

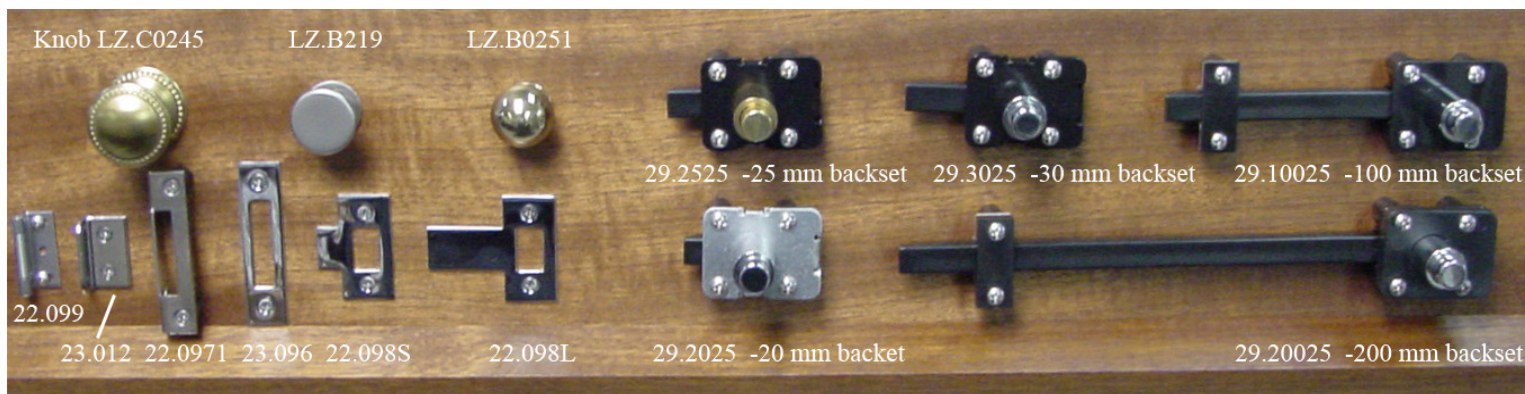

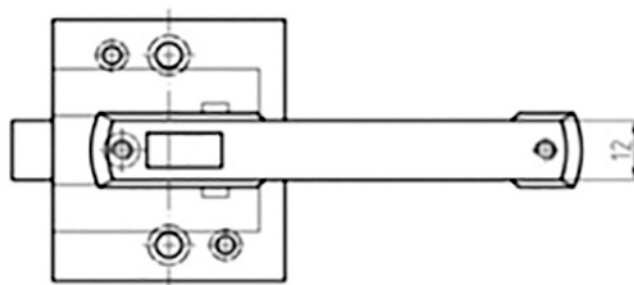


#24.080 Cabinet pull; 92x37x22mm. 29.2020 series Push latch Black body. #29.2025 Body + filler plate 1/4" thick. Aluminum color body #29.2025

PUSH MECHANISM Part no.	Body Finish	Backset:	Door thickness:	Specify FINISH Button & Sleeve	Finish Code
29.2020	silver or black	3/4" - 19 mm	3/4" - 19 mm	BRASS POLISHED	106
29.2025	silver or black	3/4" - 19 mm	1" - 25 mm	BRASS BRUSHED	506
29.2032	silver or black	3/4" - 19 mm	1 1/4" - 32 mm	CHROME POLISHED	266
29.2038	silver or black	3/4" - 9 mm	1 1/2" - 38 mm	CHROME BRUSHED	566
29.2520	silver or black	1" - 25 mm	3/4" 19 mm	NICKEL POLISHED	256
29.2525	silver or black	1" - 25 mm	1" - 25 mm	NICKEL BRUSHED	556
29.2532	silver or black	1" - 25 mm	1 1/4" - 32 mm	GOLD POLISHED	286
29.2538	silver or black	1" - 25 mm	1 1/2" - 38 mm	GOLD BRUSHED	586
29.3020	silver or black	1 3/16" - 30 mm	3/4" 19 mm	DARK BRONZE	546
29.3025	silver or black	1 3/16" - 30 mm	1" - 25 mm		
29.3032	silver or black	1 3/16" - 30 mm	1 1/4" - 32 mm		
29.3038	silver or black	1 3/16" - 30 mm	1 1/2" - 38 mm		
29.0000	silver or black	Specify Backset	Specify door thickness	Please specify	
24.020	1/4" filler plate	Use with roller bolt strike #22.099	6 X 35 X 45 mm		
24.0001	1 mm filler plate	For shimming out body	1 X 35 X 45 mm		
24.0002	1/4" spacer for guide	For shimming latch bolt			
24.0003	1 mm spacer for guide	For shimming latch bolt			
24.0004	Guide for long bolt	aluminum			
24.0005	1/4" spacer for knob	For shimming knob	6 X 10 mm diameter		
24.0006	Threaded rods M4	Stainless steel			
22.098S	Strike plate flush short	Brushed nickel over brass	 Lip 9 mm long		
22.098L	Strike plate flush Long	Brushed nickel over brass	 Lip 30 mm		
22.0971	Strike plate angle For overlay doors	Brushed nickel over brass	63 x14 x 10 mm		
22.096	Strike plate No lip	Brushed nickel over brass	63 x13 mm		
22.099	Roller bolt strike	Brushed stainless steel	30 mm x 10 mm		
23.012	Strike plate angle	Brushed nickel over brass			

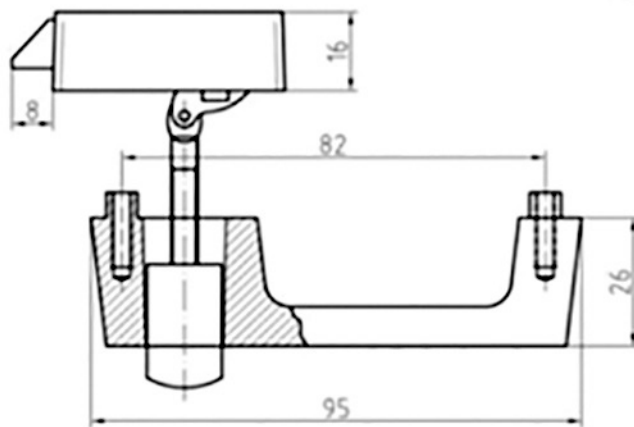

Backset 20 mm	Backset 25 mm	Backset 30 mm	BACKSET MECHANISM IN RELATION TO DOOR LAY OUT
CUT HOLE FOR KNOB FROM EDGE OF DOOR AT:			DOOR THICKNESS (= B) ORDER FOR 3/4" INCH DOOR, OR 1" DOORS OR SPECIFY CUSTOM DOOR THICKNESS. UPTO 1 1/2" THICK.
20mm Part no. 29.2020	25 mm Part no. 29.2520	30 mm Part no. 29.3020 Up to 100 mm / 7 inch	Layout 1 Set up with flush doors and flush strike Strike #22.098S short #22.98L long
31mm Part no. 29.2020	36 mm Part no. 29.2520	41 mm Part no. 29.3020 Up to 100 mm / 7 inch	Layout 2 Set up with overlay doors with angle strike for overlay doors Angle Strike #23.097
28mm Part no. 29.2020	33 mm Part no. 29.2520	38 mm Part no. 29.3020 Up to 100 mm / 7 inch	Layout 3 Set up with flush doors and roller bolt strike 1/4" filler plate required Roller Strike #23.099
37mm Part no. 29.2020	42 mm Part no. 29.2520	47 mm Part no. 29.3020 Up to 100 mm / 7 inch	Layout 4 Set up with overlay doors and roller bolt strike 1/4" filler plate required Strike #23.099

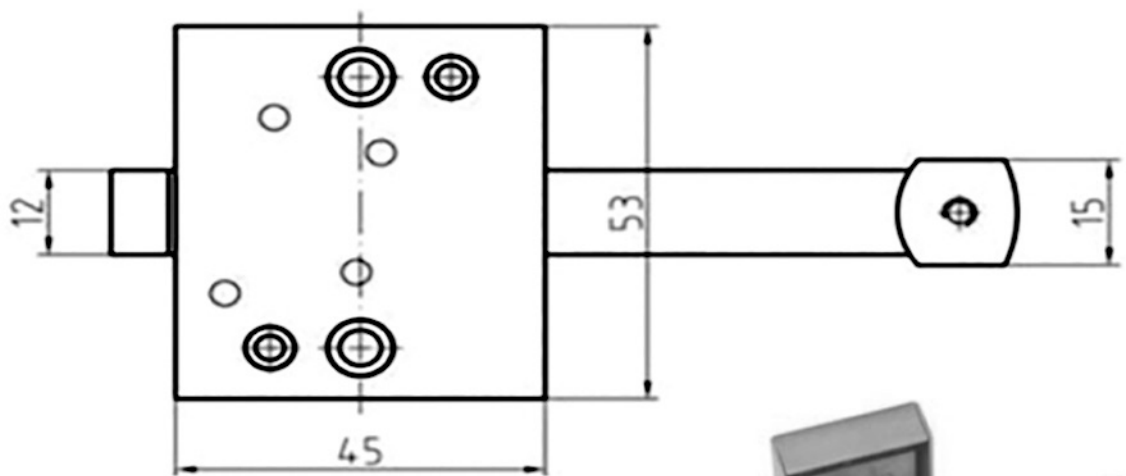

Part no. 24.1520



Push Latch Assembly
Black

Push Latch Assembly
Silver

Pull Latch Assembly
Black

Pull Latch Assembly
Silver



Latch Body
Black

Latch Body
Silver

Latch Body Spacer
1/4" (6mm)

Latch Body Spacer
1/8" (3mm)

Latch Body Spacer
1/16" (1mm)



A B C D E
Black Pull Latch Sleeve

A.	1/2"	(15mm)
B.	3/4"	(20mm)
C.	1"	(25mm)
D.	1 1/2"	(38mm)
E.	1 3/4"	(42mm)



A B C D
Silver Pull Latch Sleeve

A.	1/2"	(15mm)
B.	3/4"	(20mm)
C.	1"	(25mm)
D.	1 1/2"	(38mm)



A B C D E
Brass Pull Latch Plunger
Nickel-Plated
Available in 8-32 or M-4

A.	1/2"	(15mm)
B.	3/4"	(20mm)
C.	1"	(25mm)
D.	1 1/2"	(38mm)
E.	1 3/4"	(42mm)



Guide Block
Black

Guide Block
Silver

A B C
Guide Block Spacer

A.	1/4"	(6mm)
B.	1/8"	(3mm)
C.	1/16"	(1mm)

A B
Round Knob Spacer

A.	1/4"	(6mm)
B.	1/8"	(1mm)



SS
Roller
Strike

Push
Latch
Sleeve
Brass

Push
Latch
Sleeve
Chrome

Push
Button
Brass

Push
Button
Chrome

Push
Button
Plunger

8-32 / M-4
Knob Screw

SS
Latch
Spring



A B C D E F G
Available Latch Bolt Backsets

A.	3/4"	(20mm)
B.	1"	(25mm)
C.	1 1/4"	(29mm)
D.	1 3/4"	(35mm)
E.	4"	(100mm)
F.	8"	(200mm)
G.	11 3/4"	(298mm)