

IZERWAREN




Chapter Five

Flush Levers for Pocket Doors and Sliding Doors, Bulwark Latches, Sliding Door Track, Flush Pulls



Edition 26

Non Corrosive Fine Building and Ships Hardware
IZERWAREN.COM




EUROPE TYPE HANDING

Standard European (DIN) Handing for Mortise Locks and Swinging Doors:

The DIN Standard (Deutsche Industrie Norm) applies to most Mega Yachts Door Schedules.

OUTSIDE

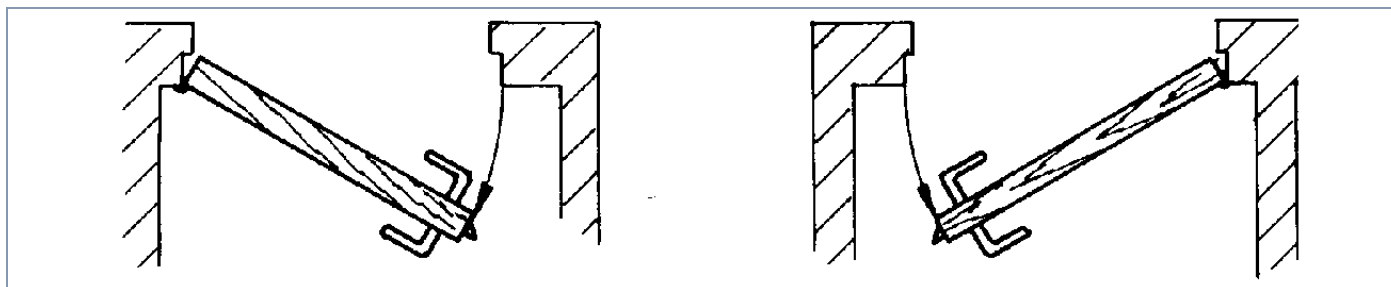


INSIDE

DIN LEFT HAND


DIN RIGHT HAND

STANDARD UNITED STATES Handing schedule:

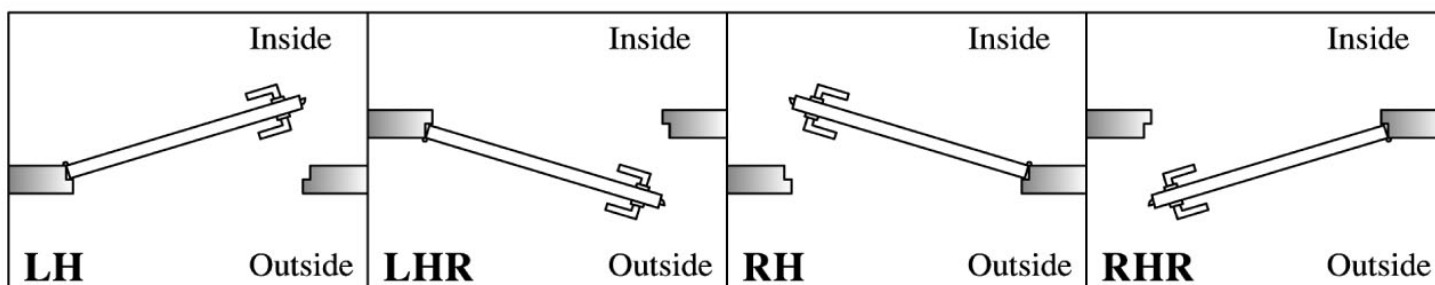



Handing Door Schedules for:

Residential European (DIN) and Residential American (US) Swinging Door
the following schedule applies, showing DIN Standard and US Standard:

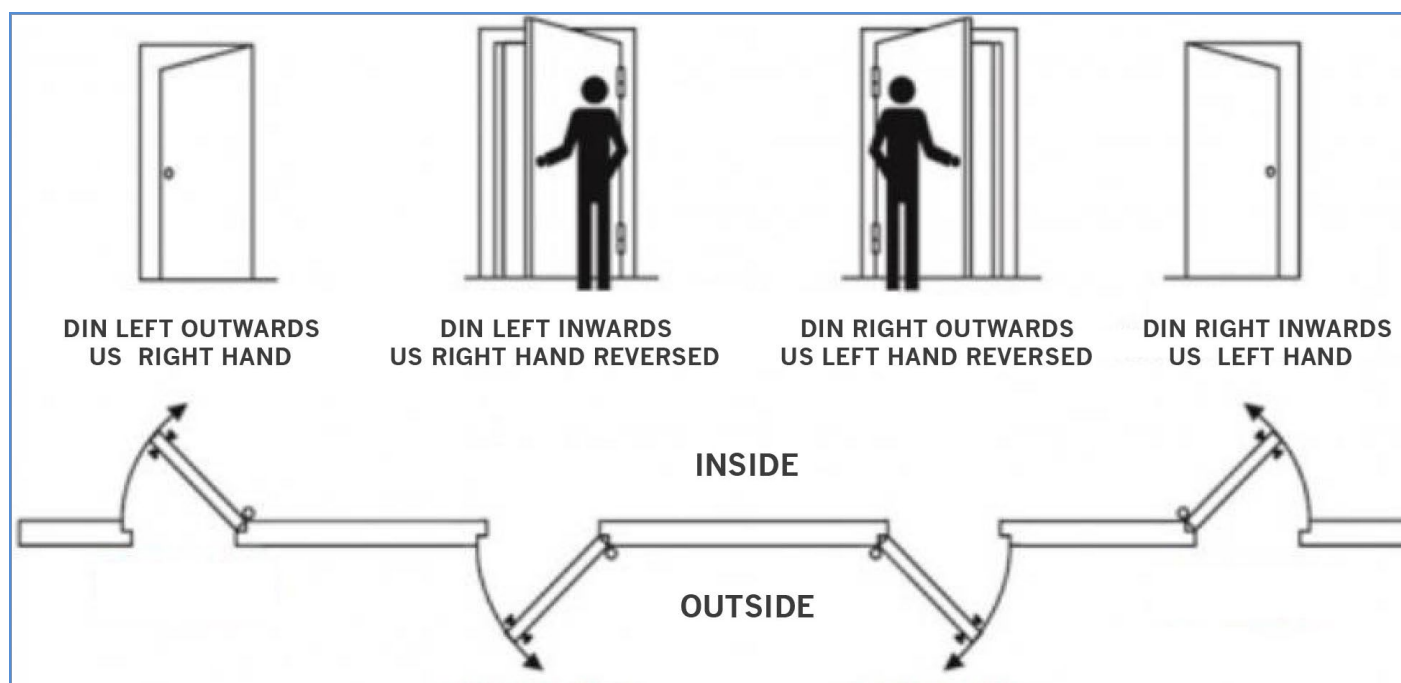



Standard US Hinges Handing

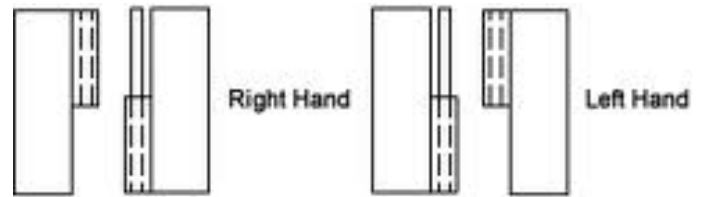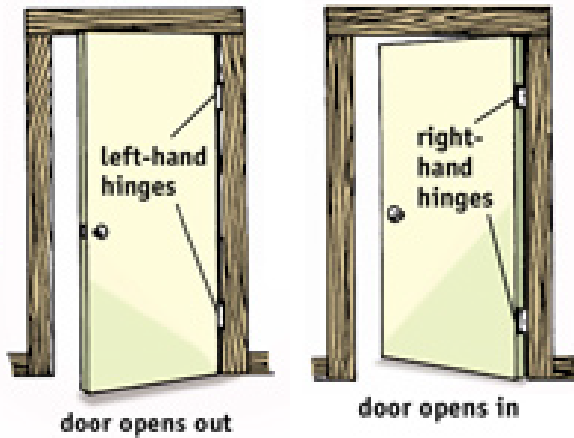

Handing For Standard US Butt Hinges and Lift Off Hinges (Slip Joint Hinges)




Handicapped Code Full Away Swinging Hinges and Butt Hinge Installation

Hinge Swaging




Hinge not swaged — figure 1



Hinge not swaged — figure 2




Hinge swaged (standard)
— figure 3



Hinge swaged (standard)
— figure 4






*Hinge with one leaf swaged
— figure 5



*Hinge with one leaf swaged flat
— figure 6

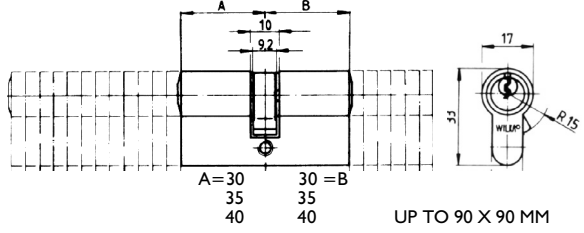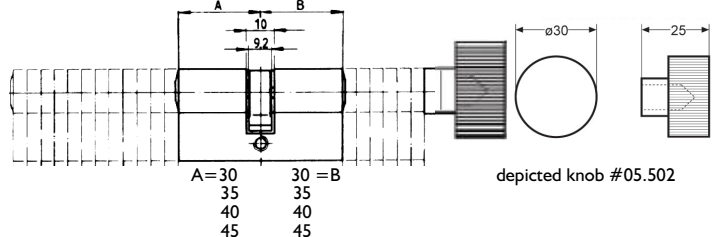

Order: key-key / key-knob / half cylinder		Finish	Materials: Chrome plated brass and stainless steel parts
 Picture Profile Cylinder key/key series #05.400.266 62 MM OVERAL LENGTH UP TO 182 MM OVERAL LENGTH WITH INCREMENTS OF 5 MM ALSO AVAILABLE IN ACYMETRIC SET UP			 UP TO 90 X 90 MM
05.488.266	key/key A-B	Polished chrome	A= 26.5 mm B= 26.5 mm key-key; polished chrome
05.400.266	key/key A-B	Polished chrome	A= 30 mm B= 30 mm key-key; polished chrome
05.433.266	key/key A-B	Polished chrome	A= 35 mm B= 35 mm key-key; polished chrome
05.404040	key/key A-B	Polished chrome	A= 40 mm B= 40 mm key-key; polished chrome
05.404545	key/key A-B	Polished chrome	A= 45 mm B= 45 mm key-key; polished chrome
05.405050	key/key A-B	Polished chrome	A= 50 mm B= 50 mm key-key; polished chrome
05.40--/--	key/key A-B	Polished chrome	ASYMETRIC SIZES KEY-KEY SET ARE AVAILABLE FROM STOCK
 62 MM OVERAL LENGTH UP TO 182 MM OVERAL LENGTH NOT COUNTING THE KNOB ON LINE ORDERS ARE SHIPPED WITH KNOB : #05.502		 Key blanks #05.150 silver nickel	 CUSTOM SIZES SPECIAL ORDER; UP TO 90 X 90 MM - CAN BE SPECIFIED ALSO AACYMMETRIC AVAILABLE with 5 mm increments
05.407.566	key/knob	Polished chrome	A= 26.5 mm B= 26.5 mm key-knob; polished chrome
05.405.266	key/knob	Polished chrome	A= 30 mm B= 30 mm key-knob; polished chrome
05.43535	key/knob	Polished chrome	A= 35 mm B= 35 mm key-knob; polished chrome
05.44040	key/knob	Polished chrome	A= 40 mm B= 40 mm key-knob; polished chrome
05.4545	key/knob	Polished chrome	A= 45 mm B= 45 mm key-knob; polished chrome
05.5050	key/knob	Polished chrome	A= 50 mm B= 50 mm key-knob; polished chrome
05.6060	key/knob	Polished chrome	A= 60 mm B= 60 mm key-knob; polished chrome
05.--/--	key/knob	Polished chrome	ASYMETRIC SIZES KEY-KNOB SET ARE AVAILABLE FROM STOCK
 Half keyway #05.415 key/- UP TO 90 MM			 Half knob #05.416 knob/- Knob showing #05.WIL 32 x 35 mm special order
05.415.266	Key/ - 30 - 0	Polished chrome	A= 30 mm B= 0 mm key---; polished chrome
05.417.266	Key/ - 35 - 0	Polished chrome	A= 35 mm B= 0 mm key---; polished chrome
05.416.266	Knob/ - 30 - 0	Polished chrome	A= 30 mm B= 0 mm key---; polished chrome
05.418.266	Knob/ - 35 - 0	Polished chrome	A= 35 mm B= 0 mm key---; polished chrome

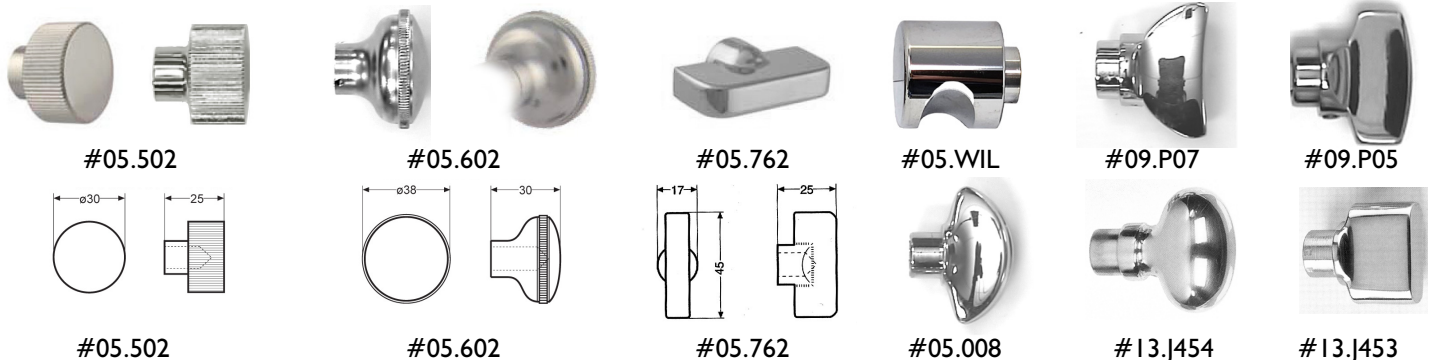

OUR MARINE GRADE PROFILE CYLINDERS ARE AVAILABLE IN CUSTOM SYMETRIC AND ASYMETRIC SIZES & FINISHES WITH THE KNOBS LISTED ABOVE

AT sales@izerware.com



IZERWAREN
Order
numbers

- Mortise lock, backset 55 mm - 2 3/16"
- Pocket doors: Minimum door thickness using flush escutcheon plates on both sides: 1 3/4"
- Minimum door thickness using protruding door lever handles: 32 mm - 1 1/4"
- Solid brass hook bolt
- Round corners on lock plate
- Polished chrome plated brass



13.81Z5 **SET: Entry Sliding Door Mortise Lock with escutcheon plates and levers**




13.81Z6 **SET: Entry Sliding Door Mortise Lock with flush escutcheon plates and levers**

13.81Z **Sliding Door Mortise Lock only**
Center spindle hole to center key hole: 75 mm
Case: 80 mm x 152 mm x 16 mm thick
Front plate 210 x 25 mm
For 9x9 mm spindle /door lever handles
Use with profile cylinder key/key or knob/key


13.81S **Strike plate** (stainless, square corners)

13.81B **Strike plate** (brass, round corners)


05.400 **Profile Cylinder** key/key 30/30 mm



see page 0-5 for details

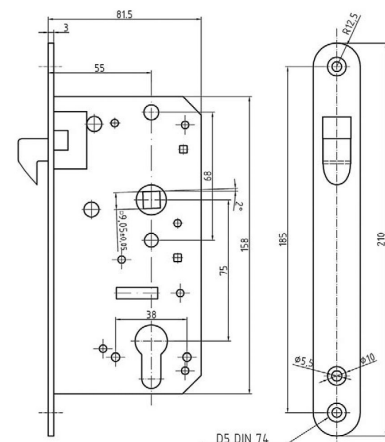

Entry Lock Set#13.81Z5; 55 mm backset; Levers #14.999 Escutcheon #14.129

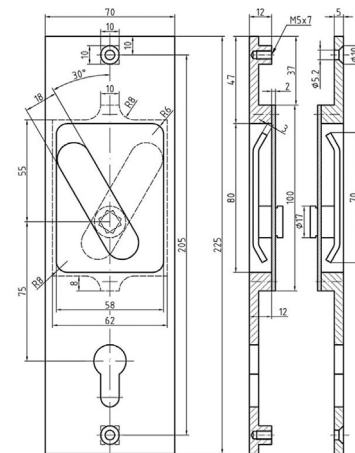


Entry Lock Set#13.81Z6; 55 mm backset; Flush lever set: #13.610Z
Minimum door thickness this set up: 42 mm or 1 3/4 inch

13.81W **Privacy Sliding Mortise Lock**


13.81F **Passage Sliding Mortise Lock**
Case: 80 mm x 152 mm x 16 mm thick
Front plate 210 x 25 mm
9x9 mm spindle for lever handles

13.81S **Strike plate**

13.610Z **Flush Lever& Escutcheon pair**

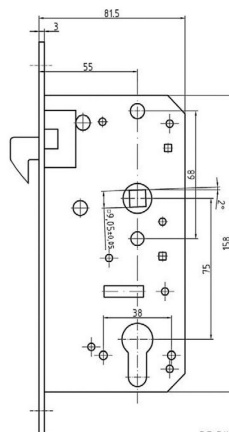

#13.81Z



#13.81S



Edge pulls #13.249;





#13.219;




#13.239


For Pocket Doors. Sizes Edge Pulls: see page 5-2

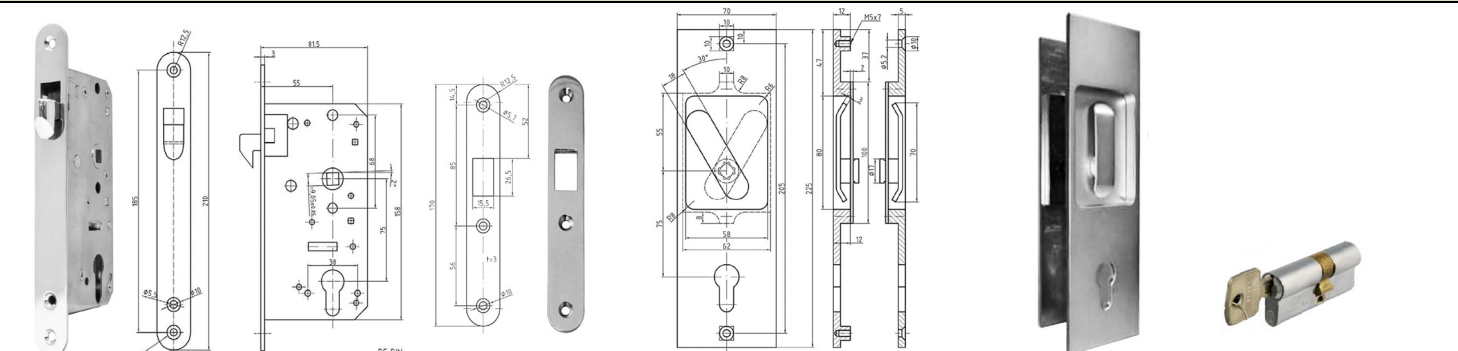


#13.81Z6 SET Complete Sliding Entry Mortise Lock Set. 55 mm backset;
Parts separate: Sliding door lock with strike plate #13.81Z; Profile cylinder keyway 05included; Flush Trim Set #13.610Z; dimensions: 2 3/4 x 8 7/8 inch 8; Plates Protrude from surface door 1/4 inch; **MINIMUM DOOR THICKNESS: 1 3/4 INCH or 44 mm.**

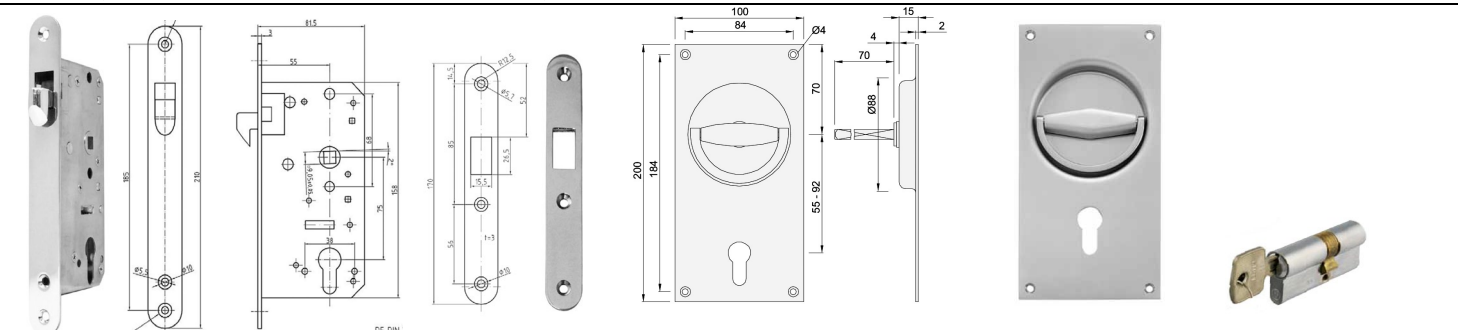


#13.81Z8 SET Complete Sliding Entry Mortise Lock Set. 55 mm backset
Parts separate: Sliding door lock with strike plate #13.81Z;; Stainless steel Flush lever on plate #51.004 ; Flush Set protrudes from surface door: 1/8 inch.;
Size plate: 3 15/16 x 7 7/8 inch; **MINIMUM DOOR THICKNESS: 2 1/8 INCH OR 53 MM**

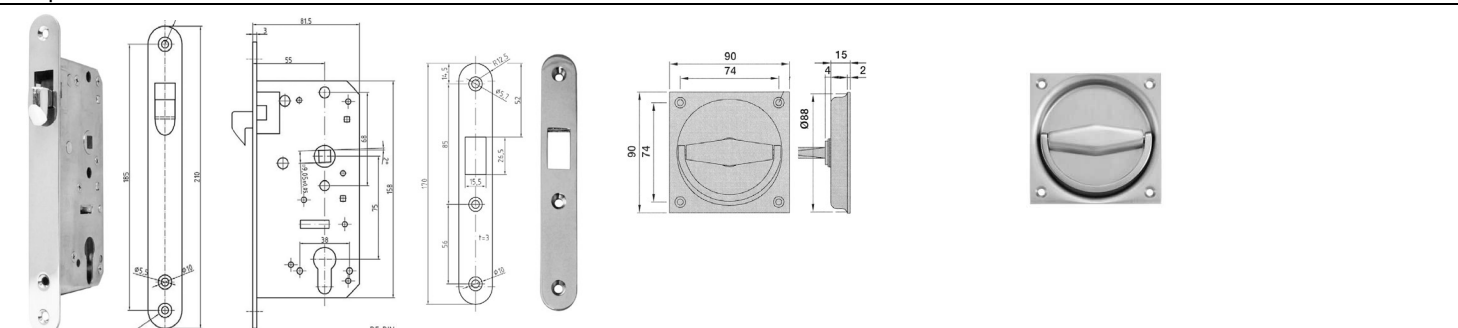


#13.81F8 SET Complete Sliding Passage Mortise Lock Set. 55 mm backset.
Parts separate: Sliding door latch with strike plate #13.81F; Stainless steel Flush lever on plate #51.016 ; Flush Set protrudes from surface door: 1/8 inch.;
Size plate: 3 9/16 x 3 9/16 inch; **MINIMUM DOOR THICKNESS: 2 1/8 INCH OR 53 MM**

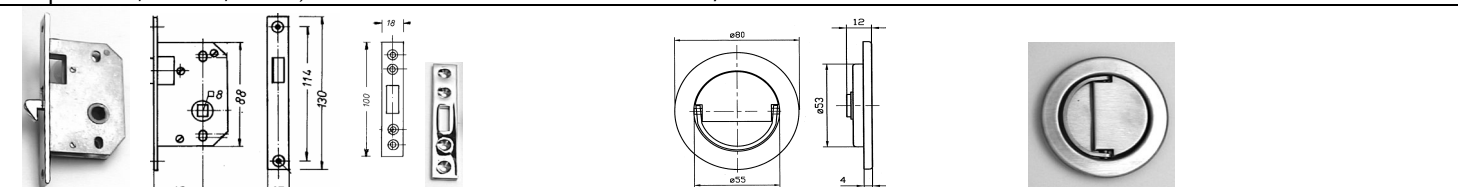

Set: #51.0891F; Flush Sliding Passage Set. 40 mm backset. With 316 Stainless steel Flush Door Lever #51.391; 80 mm diameter.
DOOR THICKNESS: 1 1/2" OR 38 MM


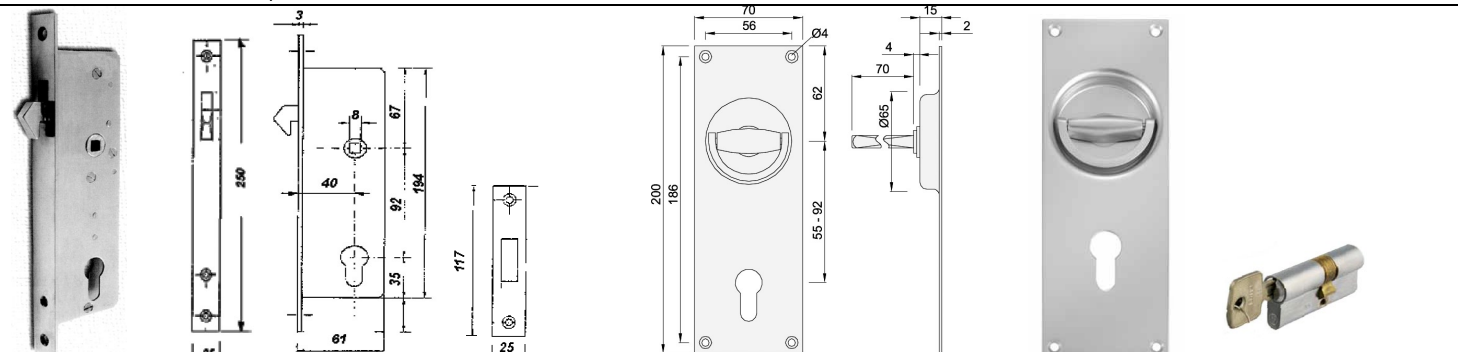


Set: #51.01525Z; Flush Sliding Entry Set with Flush Aluminum. 40 mm backset. Door Lever #51.5001A on plate 70 x 200 mm, Stainless steel Lock with strike #14.152; **DOOR THICKNESS: 2 1/8" OR 52 MM**




FOR 2 3/8" DOOR THICKNESS

Lock backset: From 55 mm to 65 mm
Distance Lever to keyhole: 75 to 92 mm

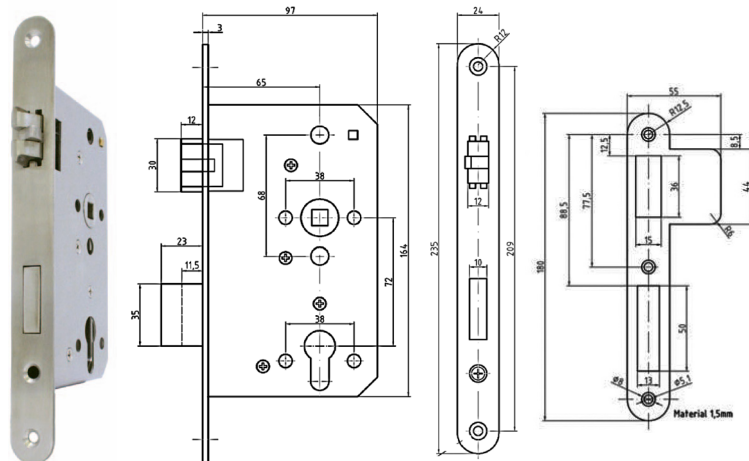

Use Entry lock set #14.31272 65 mm backset Satin Stainless Steel






Izerwaren
Order
number


- High quality German 304 Stainless Steel Flush door lever handles for full size mortise locks with a min. backset of 55 mm
- Finish: Satin stainless steel or mirror polished stainless steel.

FOR 2 3/4 INCH DOOR THICKNESS

- 53.6535 **Flush Plate with Lever, for use with entry set with Profile Cylinder**
304 stainless steel
Plate 240 x 170 mm;
Build in: 220 x 150 mm
Build in depth: 20mm
Finish: satin or polished stainless steel
With 8 x 8 mm or 9 x 9 mm square spindle

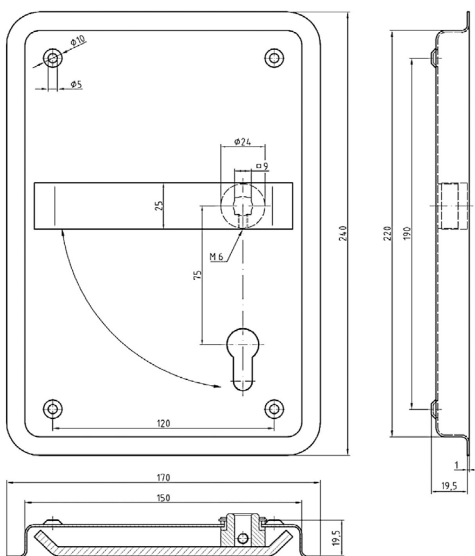


#53.653 Flush plate with lever. Plate 240 x 170 mm;
(Left Hand Side Depicted)
Entry Function for Profile Cylinder Keyway
Build in depth: 20mm
Satin or polished stainless steel

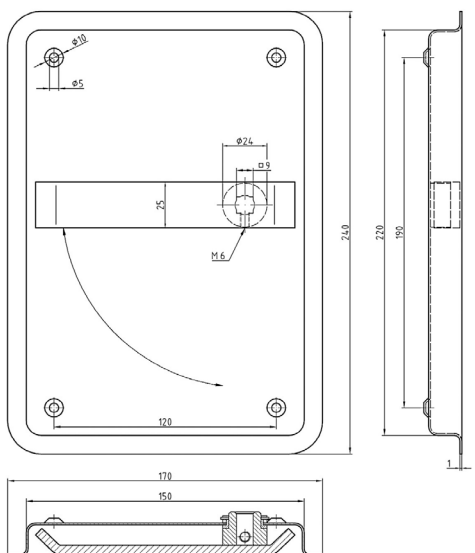


#53.659 Flush plate with lever. Passage function
(Left Hand Side Depicted)
Plate 240 x 170 mm;
Build in depth: 20 mm
Satin or polished stainless steel

NOTE: Lever not separately available
Only available as set with flush plates.
Similar lever for separate use: #12.53F on page I-I-2

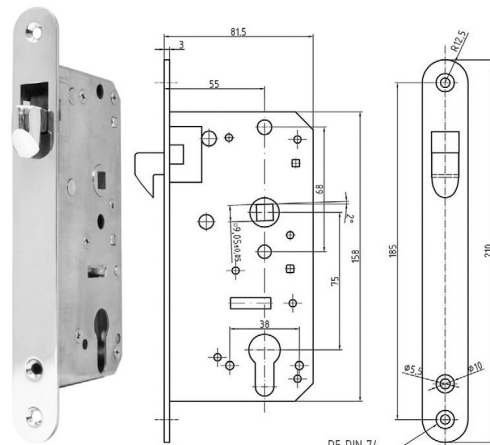

- 13.81Z2 Use with Entry Sliding Pocket Door Lock
C. spindle hole to C. key hole: 75 mm
Case: 80 mm x 152 mm x 16 mm thick
Front plate lock: 210 x 25 mm
For 9x9 mm spindle /door lever handles
For profile cylinder key/key or knob/key
- 13.81S Strike plate (stainless, square corners)
Strike plate (brass, round corners)

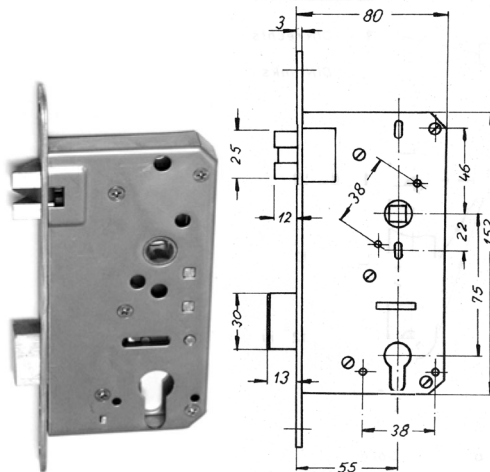


14.37Z.508 Entry Swinging Mortise lock; 55 mm backset
Stainless steel.

14.213.508 Entry strike plate

- 53.659 **Flush plate** with lever
Passage function
304 stainless steel
Plate 240 x 170 mm;
Build in: 220 x 150 mm
Build in depth: 20 mm
Finish: satin or polished stainless steel
For 8 x 8 mm or 9 x 9 mm square spindle

Email our office for price and lead-time, Handling and lock cases.



52.518 Flush Bulwark / Barrel Bolt

Left Hand

6 3/8" x 2" x 1"
Spring-loaded; Heavy duty
Build in depth: 3/4"
1/2" inch round bolt;
Extending 1 1/8"
316L stainless steel




#52.518 Bulwark / barrel bolt, spring loaded, with strike; left hand



52.519 Flush Bulwark / Barrel Bolt
Right Hand

Strike plate included
1 1/4" x 2" x 1"

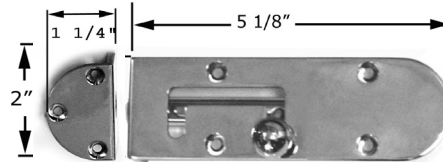

#52.519 Bulwark / Barrel bolt spring loaded with strike; right hand;
Size: 5 1/8" x 2" x 1", Strike 1 1/4" x 2" x 1"





44.55646 Transom Bolt

Body: 6.3" x 1.42"
Both Handed
316 stainless steel
Stylish Latch for Transom and Swim Platform doors.





#44.55646 Transom Bolt / Dive Door Handle
6.3" x 1.42" Both handed
316 stainless steel

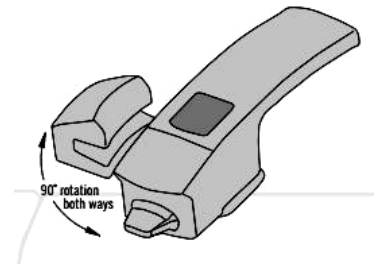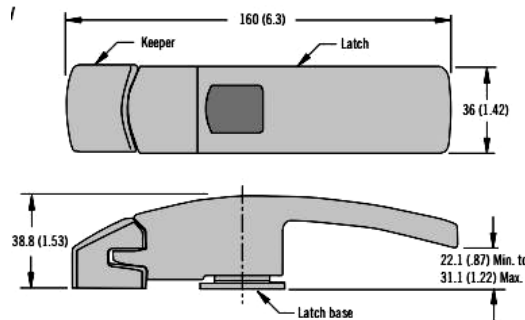


55.206 Barrel Bolt, heavy duty


304 stainless steel
Dimensions plate: 62 x 110 mm
Barrel: 16 mm diameter
throw bolt: 55 mm Exterior use

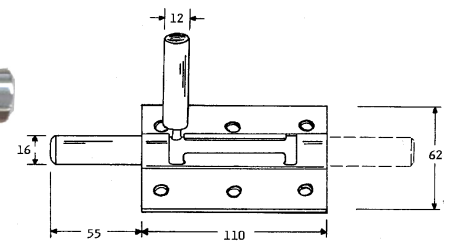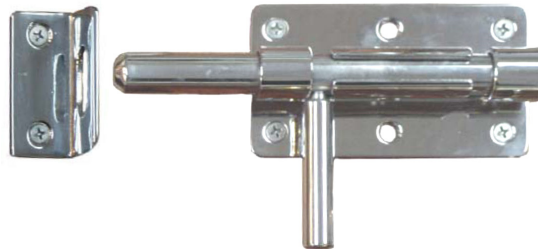

55.207 Strike angle 60 x 34 x 28 mm





55.208 Strike flush 60 x 30 mm



#55.206 Stainless steel barrel bolt plate size: 110 x 62 mm or 4 1/4 x 2 1/2"; Bolt: 16 mm diameter
Finish: Satin or polished 304 stainless steel


44.0604 Transom bolt / barrel bolt;
Size: 4" x 1 1/4" x 1/2"
Throw: 7/8"
316 Stainless Steel

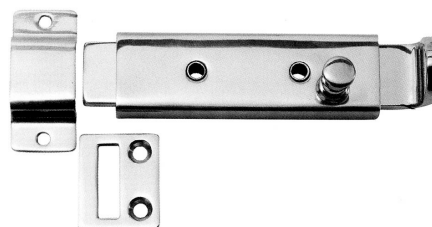

#44.0604 Transom bolt / barrel bolt; Body: 100 X 32 X 12 mm; 5.31" x 1.25" x 0.5";
Throw: 7/8" 316 stainless steel
Strike flush #44.0605; Strike angle #44.0606 included
EXCELLENT FOR BULWARK DOORS



#44.0605 #44.0605 #44.0606



- Stylish latch for transom and swim platform doors
- Intuitive operation with push button and turn handle actuation
- Premium finish and corrosion resistance

Material and Finish:

Handle, Keeper, Base button and Sleeve: 316 grade stainless steel electropolished

Keeper insert: Nylon black

O-ring: EPDM natural

Screw, Spring and Nut: 304 Stainless steel passivated


Installation Notes

Fine tuning latch and keeper alignment:

To increase the height of the latch by 3.75mm (.0156 inch), rotate the base of latch 90 degrees clockwise

To decrease the height of the latch by 3.75 (.0156), rotate the base of latch 90 degrees counter clockwise




For every 360 degree turn, the height adjusts 1.5 (.0625)

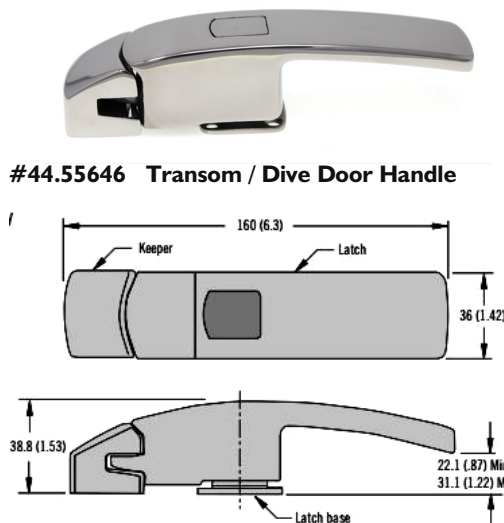


Install by unscrewing base and adjust height

#44.55646 Transom Bolt / Transom Dive Door Handle
Body: 5.3" x 1.42" Both handed; 316 stainless steel
Medium Duty see page 5-5-1 A and 5-5-1-B for other designs



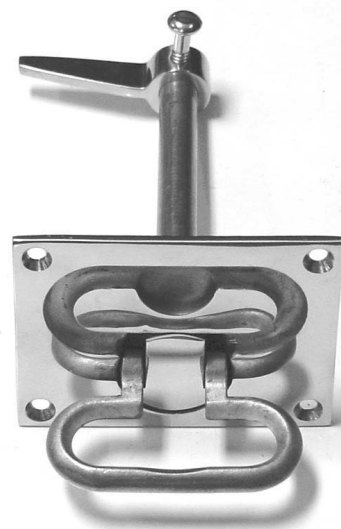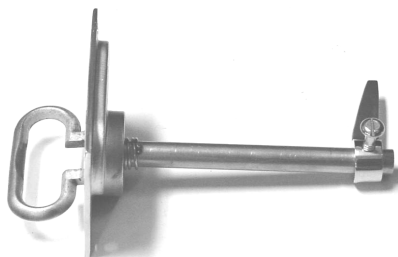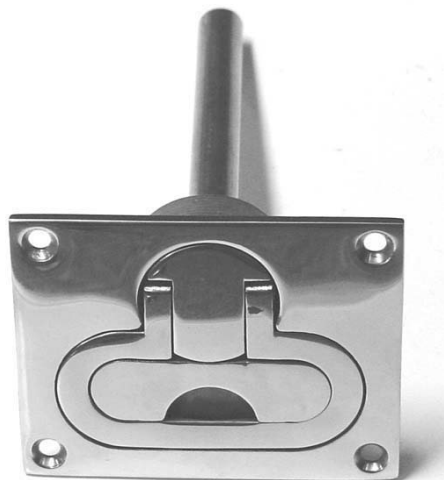

Hatch Pull with locking cam #43.219;
316 Stainless, face plate: 3 3/4 x 3 inch;
length shaft: 5 1/8" diameter: 1/2"

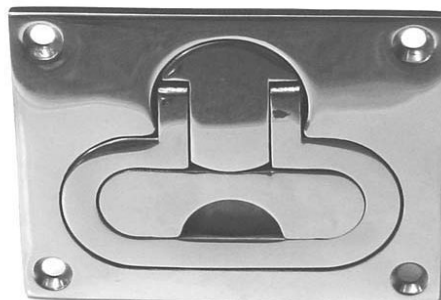

Hatch Pull only #43.217 3 3/4 x 3 inch;



Izerwaren
Order #

316 Stainless steel heavy duty track for sliding doors.

Maximum door weight system #5:

33 lbs. using 2 carts; carts placed at 36 inches distance.

For heavier doors: see page 5-4-1 and 5-4-2,

Finish: rolled 316 stainless steel

Overhead Sliding Door Track distance between overhead and door bracket: 1 1/2" or 38 mm

54.211 **Rails #5,** 21 x 21 x 1 mm
316 stainless steel
specify length, increments of one meter

54.251 **Rollers #5(carts)**
4 nylon wheels on stainless steel bearings with
M 8 bolt 316 stainless steel
maximum weight per cart: 16.5 lbs


54.259 **End stop #5** with rubber buffer
316 stainless steel



54.256 **Bracket top mounted #5**
100 x 20 x 2 mm
316 stainless steel




54.258 **Bracket side mounted #5**
82 x 40 x 22 x 3 mm
316 stainless steel




54.221 **Rail bracket, 90 degree, #5**
for mounting rail against side wall
304 stainless steel

54.260 **Doorholder, plastic #5**
To keep door inside pocket, works with
Endstop # 54.259 only



31.118 **Doorholder, 316 stainless steel #31.118**
Distance 15 mm / 5/8
Mounts against the back edge of door to hold door in pocket

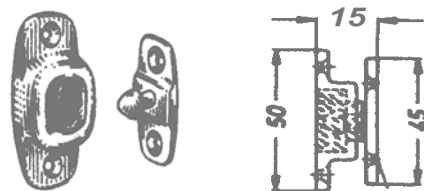

System #5 roller #54.251; nylon wheels,
stainless steel bearings




endstop #54.259,




Top mounted door bracket #54.256;



Side mounted door bracket #54.258

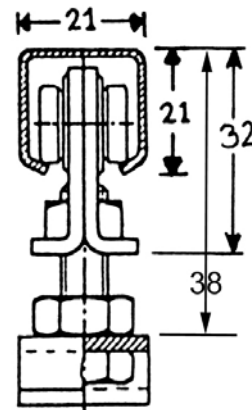



rail system #5



wallbracket #5
#54.221




#54.281 bottom guide wheel
for sliding door. Plate
stainless steel 23 x 100 mm;
4 mm thick.
Diameter nylon wheel:
19 mm or 3/4 inch.

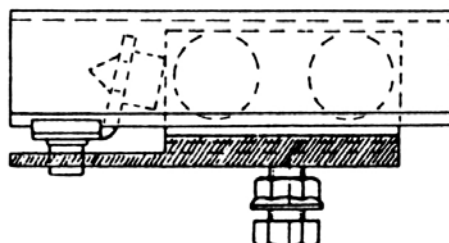

Keeper, plastic #54.260
To keep door inside pocket, works with endstop
#54.259 only



Depicted with aluminum U
shaped profile 1 x 1 inch.
Wall thickness: 1/8 inch




IZERWAREN
order #

316 Stainless steel heavy duty track for sliding doors.

Maximum door weight system #7:
165 lbs. using 2 carts; carts placed at 36 inches distance.
For different weight doors:
see page 5-4 and 5-4-2,
Finish: rolled 316 stainless steel


Overhead Sliding Door Track #7
Minimum distance between overhead and door: 1 1/2" or 38 mm



Track #7 #54.717

3

Roller #7 #54.751



rail system #7

54.717 **Rails #7**, 30 x 27 x 2 mm
316 stainless steel
specify length, increments of one meter

54.751 **Rollers #7(carts)**
4 nylon wheels on stainless steel bearings with M8 bolt. 316 stainless steel
maximum weight per cart: 82.5 lbs

54.759 **End stop #7** with rubber buffer
316 stainless steel



#7 Endstop #54.759





54.760 **Bracket top mounted #7**
100 x 20 x 2 mm
316 stainless steel




#7 Top mounted door bracket #54.760

54.758 **Bracket side mounted #7**
82 x 40 x 22 x 3 mm
316 stainless steel




#7 Side mounted door bracket #54.758

54.756 **Doorholder, plastic #7**
To keep door inside pocket, works with Endstop# 54.759 only





31.118 **Doorholder, 316 stainless steel #31.118**
Distance 15 mm / 5/8
Mounts against the back edge of door to hold door in pocket

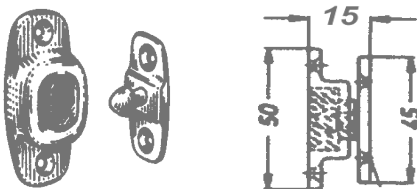


54.722 **Rail to wall bracket, 90 degree, #7**
for mounting rail against side wall
304 stainless steel

54.234 **Connecting bracket#7** for rail #7
With set screws


#7 Keeper, plastic #54.756
To keep door inside pocket, works with endstop only

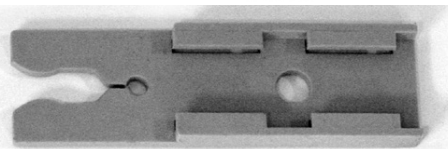

#7 Connecting bracket #54.234 for rail #54.717



rail system #7 with glass clamping brackets #85.S71



#7 Wallbracket #54.722



Connecting bracket #54.234 for rail #7
With set screws



#54.281 bottom guide wheel for sliding door. Plate stainless steel 23 x 100 mm; 4 mm thick.
Diameter nylon wheel: 19 mm or 3/4 inch.



Depicted with aluminum U shaped profile 1 x 1 inch. Wall thickness: 1/8 inch



Izerwaren
order #


316 Stainless Steel Sliding Door Track and Accessories

Page 5-4-2


316 Stainless steel heavy duty track for sliding doors.

Maximum door weight system #8:
440 lbs. using 2 carts; carts placed at 36 inches distance.
For different weight doors:
see page 5-4 and 5-4-1,
Finish: rolled 316 stainless steel

Overhead Sliding Door Track #8
Minimum distance between overhead and door: 3 1/4" or 82 mm

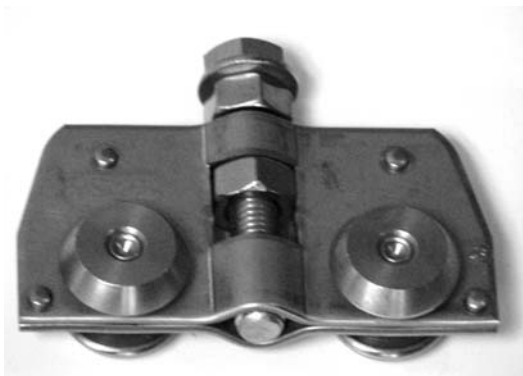

Roller #8 #54.851;
316 stainless steel with stainless steel bearings

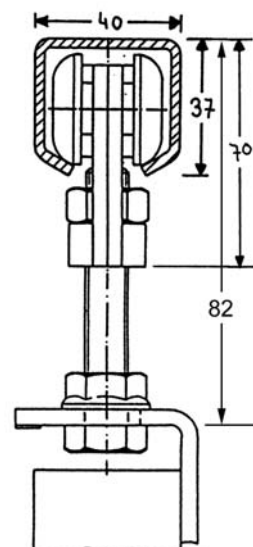

System #8 sliding track

54.815 **Rails #8,** 40 x 37 x 3 mm
316 stainless steel
specify length, increments of one meter

54.851 **Rollers #8(carts)**
4 stainless steel wheels on stainless steel bearings with M12 bolt
316 stainless steel
maximum weight per cart: 220 lbs


54.859 **End stop #8** with rubber buffer
316 stainless steel



54.860 **Bracket top mounted #8**
160 x 35 x 4 mm
316 stainless steel



54.858 **Bracket side mounted #8**
82 x 40 x 22 x 3 mm
316 stainless steel



54.821 **Rail to wall bracket #8, 90 degree,**
for mounting rail against side wall
316 stainless steel



54.825 **Wall bracket #8** two parts;
Clamp sideways adjustable.




54.835 **Ceiling or overhead bracket #8**




54.281 **Bottom guide wheel** 19 mm / 3/4"



#8 Endstop #54.859

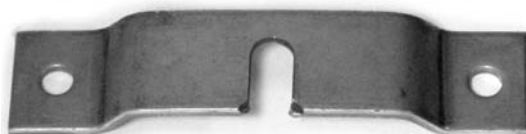


#54.860 No.8 Top mounted door bracket
160 x 35 x 4 mm or 6.25 x 0.825 x 0.25 inch



#8 Side mounted door bracket #54.858
140 x 50 x 50 x 5 mm; 5 1/2 x 1 5/8 x 1 5/8 x 7/32 inch



No. 8 overhead bracket #54.835



No. 8 wall bracket 54.825
sideways adjustable
two parts





#54.821
No. 8 rail to wall bracket



#54.281 bottom guide
for sliding doors. Stainless steel.
Plate: 4 x 23 x 100 mm;
Diameter nylon wheel:
19 mm or 3/4 inch.
Works with aluminum U channel




Depicted with aluminum U shaped
profile 1 x 1 inch.
Wall thickness: 1/8 inch.

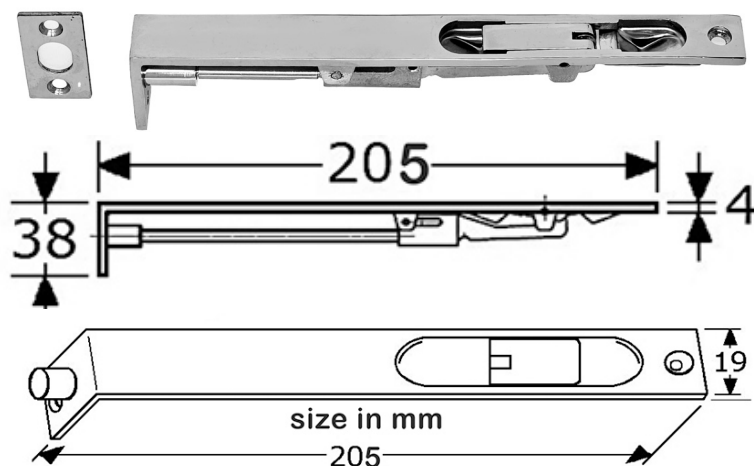

Izerwaren
Order
number


- High quality flush bolts
- Finish: Satin or polished stainless steel
- Brass flush bolts:
- Finish: polished brass (un-lacquered)
- polished chrome plated brass
- satin chrome plated brass
- custom finish

55.922 **Flush Bolt, heavy duty stainless steel**
304 stainless steel. Positive locking
Dimensions: 19 mm x 205 mm x 4 mm thick
depth: 38 mm;
12 mm diameter bolt; throw: 13 mm;
Finish: Polished stainless steel

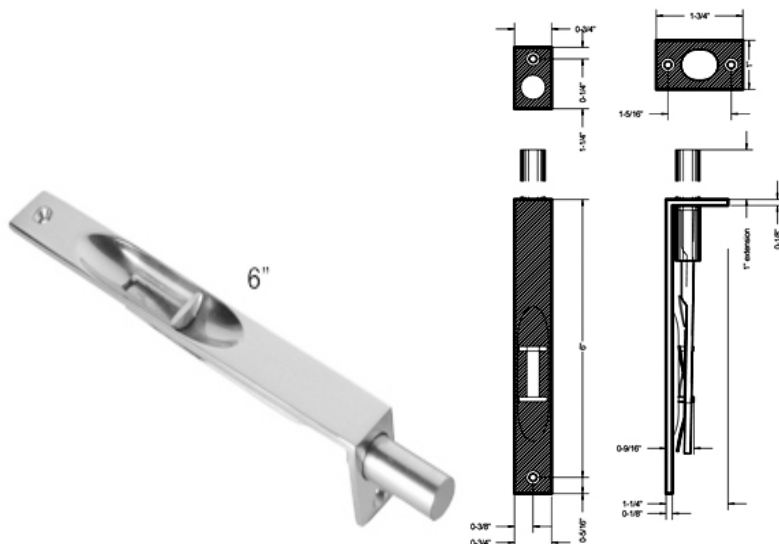

55.264 **Flush Bolt, medium duty**
brass, with some steel parts
Operates by push lever; not positive locking
Dimensions: 18 mm x 152 mm;
depth: 33 mm; throw: 25 mm
(3/4" x 6" x 1 5/16"; throw: 1")
Finish: polished or satin chrome
interior use

#55.264 Flush Bolt, medium duty; brass, with some steel parts
Operates by push lever; NOT positive locking
Dimensions: 18 mm x 152 mm; depth: 33 mm; throw: 25 mm
Flush bolt 3/4"x 6"; depth: 1 5/16"; throw: 1" Bolt diameter.
Finish: polished brass and polished or satin chrome; interior use

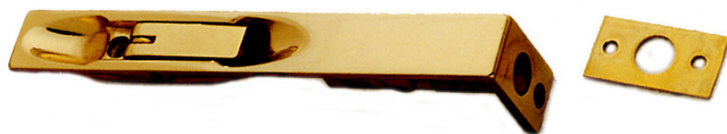

55.668 **Flush Bolt, medium duty**
brass, with stainless steel parts
Positive locking in open or closed position
Dimensions: 20 mm x 152 mm;
depth: 33 mm; throw: 15 mm
(3/4" x 6" x 1 5/16"; throw: 5/8")
Finish: polished or satin chrome

#55.668 series flush bolt 3/4"x 6"; depth: 1 5/16"; throw: 5/8;
Solid brass with stainless steel pins and springs.
Positive locking in open or closed position
Marine grade.



55.3251 **Flush Bolt, light duty brass**
55.3252 **Flush Bolt, light duty chrome**
Operates by push lever; not positive locking
Dimensions:
15 x 102 mm, polished brass
15 x 102 mm, polished chrome
Bolt: 8 mm diameter, throw: 14 mm

#55.3251 flush bolt 102 x 15 mm; polished brass Bolt: 8 mm diameter
#55.3252 flush bolt 102 x 15 mm; polished chrome Throw: 14 mm
Operates by push lever; not positive locking



IZERWAREN
Order
numbers
44.2909

- High quality barrel bolts

Barrel bolt:

Overall: 133 X 38 X 19 mm;
5 1/4" x 1 1/2" x 3/4"; Throw: 1 1/8"



44.2909 Transom bolt / barrel bolt 5 inch; 316 stainless steel
Overall: 133 X 38 X 19 mm; 5 1/4" x 1 1/2" x 3/4"; Throw: 1 1/8"

44.5455

Barrel bolt:

Overall: 110 X 38 X 19 mm;
4 3/8" x 1 1/2" x 3/4"; Throw: 1"
316 stainless steel



44.5455 Transom bolt / barrel bolt 4 3/8 inch; 316 stainless steel
Overall: 110 X 38 X 19 mm; 4 3/8" x 1 1/2" x 3/4"; Throw: 1"

92.080

Barrel Bolt, light duty

Dimension plate:
50 x 36 mm or 2 x 1 7/16"
Barrel: 10 mm diameter or 3/8"
throw bolt: 32 mm; 1 1/4"
304 stainless steel



#92.080; small barrel bolt with strike plate; plate size: 50 x 36 mm 2" x 1 7/16";
strike: 30 x 36 mm; 1 3/16" x 1 7/16"; throw: 1 1/4". 304 stainless steel

92.2080

Barrel Bolt, light duty

Dimension plate: 80 x 22 mm
Barrel: flat 12 x 2.5 mm
throw bolt: 20 mm; 3/4"
304 stainless steel



#92.2080 barrel bolt with strike; body: 80 x 22 mm; throw: 20 mm. 3/4 inch
304 stainless steel

92.081

Barrel Bolt, light duty

316 Stainless steel
5" x 1" overall
Bolt: 1/4"; Throw: 1/2"




#92.081 Barrel Bolt; 5" x 1" Bolt: 1/4" diameter; Throw: 1/2" 316 stainless steel

92.2105

Barrel Bolt, light duty

brass chrome plated
34 x 75 mm
Bolt: 8 mm; Throw: 13 mm

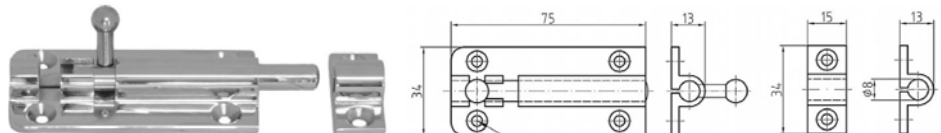


92.2105; Brass chrome plated barrel bolt; 34 x 75 mm; throw: 13 mm

92.3002

Barrel Bolt, light duty

Brass chrome plated
30 x 80 mm
Bolt flat; Throw: 13 mm

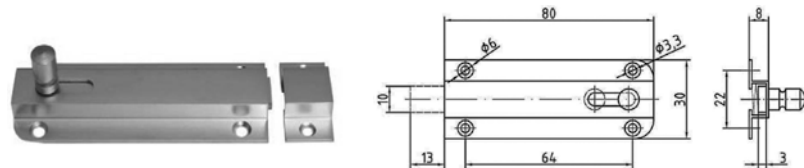


92.3002; Brass chrome plated barrel bolt; 30 x 80 mm; throw: 13 mm

92.3102

Barrel Bolt, light duty

Brass chrome plated
30 x 80 mm
Bolt offset 8 mm; Throw: 13 mm

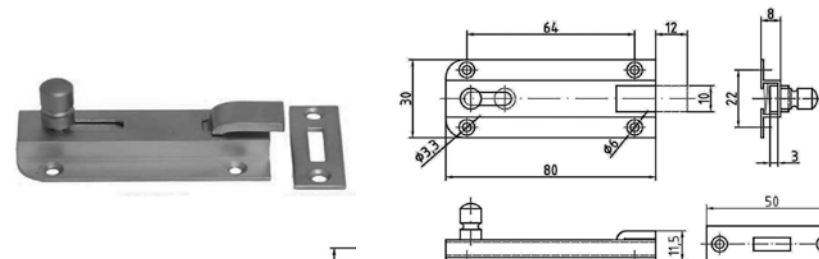



92.3102; Brass chrome plated barrel bolt offset; 30 x 80 mm; throw: 13 mm



Part #
55.296

Drawer Catch, toggle type, heavy duty

304 stainless steel
Dimensions catch: 82 x 35 mm
Bolts M5 x 35 mm; distance center to center: 60 mm
mounting plate: 75 x 38 mm; 2 mm thick
nylon toggle, activated by strike pin.
strike pin 36 x 32 angle plate; 2 mm thick;
pin M8 x 13 mm
Finish: stainless For exterior use






#55.296 304 stainless steel drawer catch with strike pin, heavy duty


55.298 **Drawer Catch, toggle type, medium duty**
Same as above, lighter spring

55.297 **Drawer Catch, light duty**

304 stainless steel
Dimensions catch: 47 x 15 mm
mounting plate: 25 x 7 mm; 1 mm thick
nylon rollers Finish: stainless




#55.297 304 stainless steel drawer catch with strike, light duty

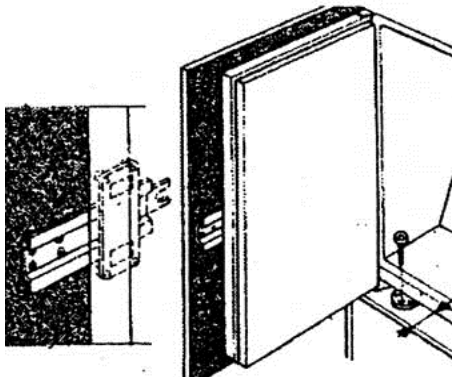


55.2603 Refrigerator double door slide #372603 white plastic

55.593 **Drawer slides, Swiss made,**
304 stainless steel, stainless steel bearings, noise arm
only 15 mm / 9/16" thick slide; 75 % extendable, 2 pieces
sizes not extended: 400, 450, 500, 550, 600, 650, 700, 750 mm
Up to 100 kg / 220 lbs




#55.593; 75% extension, 9/16" wide, weight drawer up to 220 lbs,

52.673 **Drawer slides, Swiss made,**
304 stainless steel, stainless steel bearings, noise arm
only 15 mm / 9/16" thick slide; full extendable, 3 pieces
sizes not extended: 400, 450, 500, 550, 600, 650, 700 mm
up to 35 kg 77 lbs.




#52.673, 9 16" wide, weight drawer up to 75 lbs.

52.793 **Drawer slides, Swiss made, heavy duty**
304 stainless steel, stainless steel bearings, noise arm
only 20 mm / 3/4" thick slide; full extendable, 3 pieces
sizes not extended: 400, 450, 500, 550, 600, 650, 700 mm up to 125 kg / 275 lbs.
20 mm / 3/4" thick slide; full extendable, 3 pieces

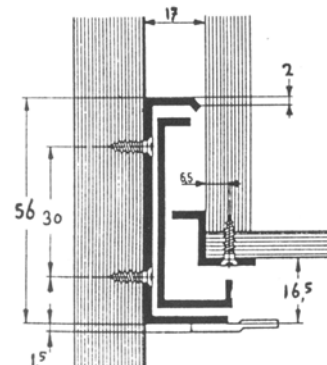

#52.793 11/16" wide, bottom mounting, weight drawer up to 275 lbs.



Izerwaren
Order
number


- Heavy duty
- Satin stainless steel
- Polished stainless steel
- PVD coated = Life Time Finish Brass, Gold color



#13.209; door edge pull, 25 mm diameter, built in depth 25 mm material: brass

13.209 **Edge pull,**
Brass Diameter: 25 mm or 1 inch
Built in depth: 25 mm or 1 inch.
Black plastic end cap

13.219 **Edge pull, heavy duty**
Ring model
304 stainless steel
Dimensions 110 x 24 mm
Round corners

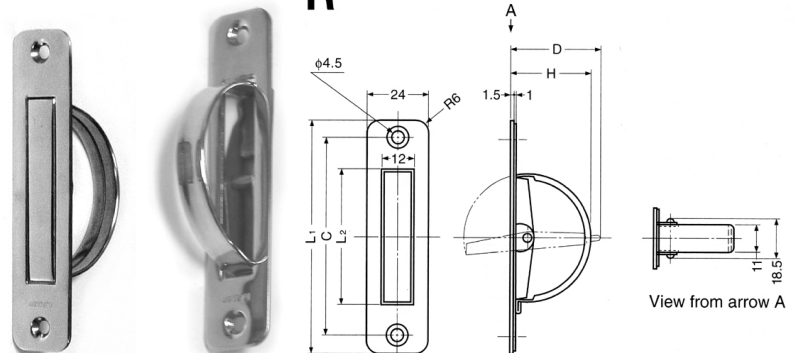

#13.219; 110 x 24 mm round corners; built in depth 30 mm; stainless steel

13.249 **Edge pull, light duty**
Single Hook model
304 stainless steel
Dimensions 100 x 20 mm
Square corners



#13.249; 100 x 20 mm; built in depth 23 mm; material stainless steel


13.229 **Edge pull, heavy duty**
Double Hook model
304 stainless steel
Dimensions 115 x 25 mm
Square corners
(not depicted)

13.239 **Edge pull, medium duty**
Double Hook model
304 stainless steel
Dimensions 91 x 22 mm
Square corners




#13.239; 91 x 22 mm; built in depth 35 mm; material stainless steel

13.475 **Edge pull, medium duty**
pull model
4 x 3/4 inch; built in depth 1 5/8 inch;
material brass
Square corners
D EP00475U3

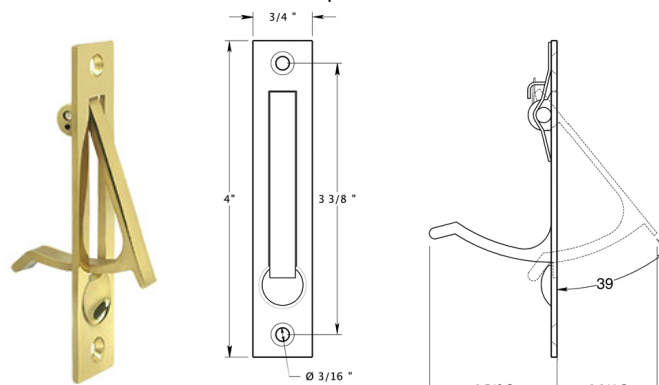


#13.475; 4 x 3/4 inch; built in depth 1 5/8 inch; material brass



Izerwaren
Order
numbers

- 43.F01 **Slam latch for hatches**
Set: latch, mounting ring with screws; strike.
Diameter: 2 3/8"
Built in diameter: 2"
Material thickness: from 1/4" up to 13/16"
Spring loaded slam action on latch bolt
Polished Stainless steel 316;
- 43.F02 **Slam latch for hatch, locking with key**


SLAM LATCH WITH LIFT RING

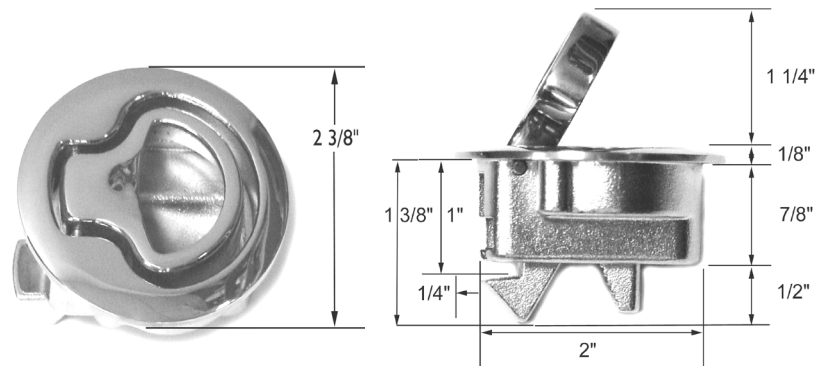

Slam latch #43.F01


Installation body: Drill hole: 2 1/16" Ø

SLAM LATCH WITH PULL LEVER ANCHOR STYLE

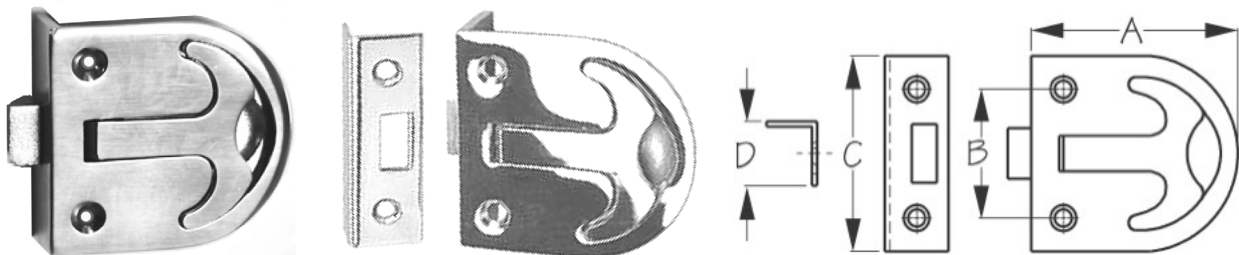


#43.831S Flush Slam latch, Pull type. Anchor style lift ring; strike plate included. **Pull Out** to release.
Dimensions: 2 7/16" (A) x 1 1/2" (B) x 2 1/4" (C) x 3/4" (D) Door thickness: 3/4". 316 Stainless Steel Satin Finish

SLAM LATCH WITH LIFT RING ANCHOR STYLE

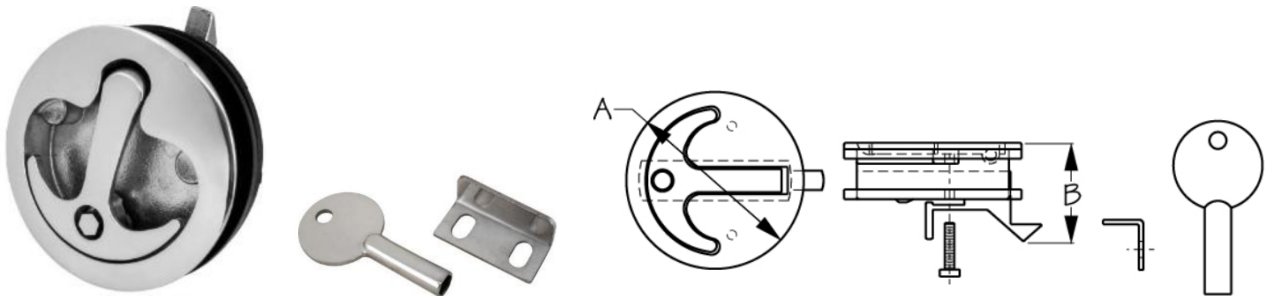


#43.972 Flush Slam latch with lift ring and angle strike plate, **locking**. **Pull Out** to release.
Dimensions: 2 3/8 diameter (A) x 1 11/16 deep (B) Hole size: 2 inch; Door thickness: 1/4 inch to 3/4 inch
316 Stainless Steel Mirror Polished Finish

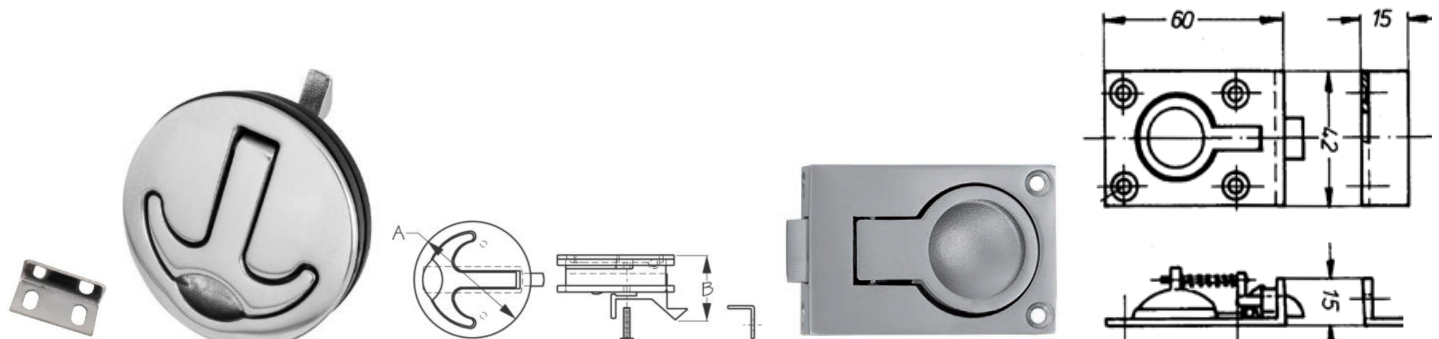

#43.9714 Slam latch 2 7/16 diameter (A); drill hole 2 3/16 inch,
distance (B): 1 3/8" material up to 5/8" thick;
316 polished stainless steel

#46.108.208 Flush Pull Lift with Latch and Strike
Dimension: 60 x 42 x 15 mm; **Pull Out** to release
Angle strike 15 x 15 x 42 mm; Door thickness: 5/8" or 15 mm
Polished Stainless Steel



Izerwaren
Order
numbers

- 316 Stainless steel slam latch with lift ring
- sea water resistant
- slam action when closing
- strike included
- finish: Lift ring polished stainless steel 316;
body and cam: satin finish

SLAM LATCH WITH LIFT RING

Polished 316 stainless steel




43.F01 Slam latch for hatches

Set: 1x latch, 1 mounting ring with screws; 1 strike
Diameter: 2 3/8"
Built in diameter: 2"
Material thickness: from 1/4" up to 13/16"
Spring loaded slam action on latch bolt

43.F02 Slam latch for hatches, with locking with key





#43.F01 Slam latch




Mounting ring; 2 3/8" diameter

#43.F01
Installation body: Drill hole: 2" Ø

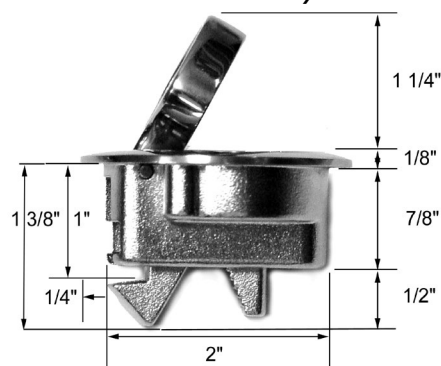

#43.505 Cabinet latch. Flush Slam Latch Mirror Polished 316 Stainless Steel Drill hole: 1 11/16" ~ 43 mm
Designed for 3/4 inch ~ 19 mm thick material. All parts high quality 316 stainless steel.


Strike plates:



#22.098S Brass nickel




#22.097I Brass nickel



#22.099 Roller Bolt stainless steel



#23.012 brass nickel



Izerwaren
Order
numbers




- sea water resistant
- slam action when closing
- strike included

Flush Slam latch for cabinet doors and hatches

43.820 Set: 1x latch, 1 strike
Chrome plated brass push- slam latch
Dimensions: 50 x 42 x 18 mm
For 3/4 inch thick doors.

PUSH SLAM LATCH

Polished chrome plated brass

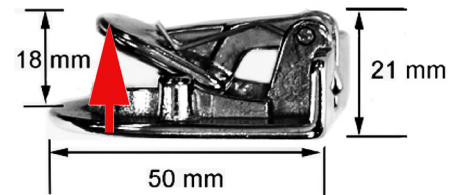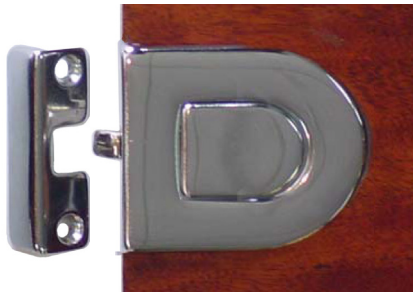

#43.820 Push Slam Latch with Strike Plate Side view
Chrome plated brass push - slam latch Dimensions: 50 x 42 x 18 mm. Door thickness: 3/4" or 19 mm


Push In to release

PULL SLAM LATCH




#43.831S Flush Slam latch, Pull type. Anchor style lift ring; strike plate included. **Pull Out** to release.
Dimensions: 61 mm long (A) x 58 mm wide (C) x 19 mm deep (D). Door thickness: 19 mm
Dimensions: 2 7/16" (A) x 1 1/2" (B) x 2 1/4" (C) x 3/4" (D) Door thickness: 3/4"
316 stainless steel Satin Finish

PULL SLAM LATCH

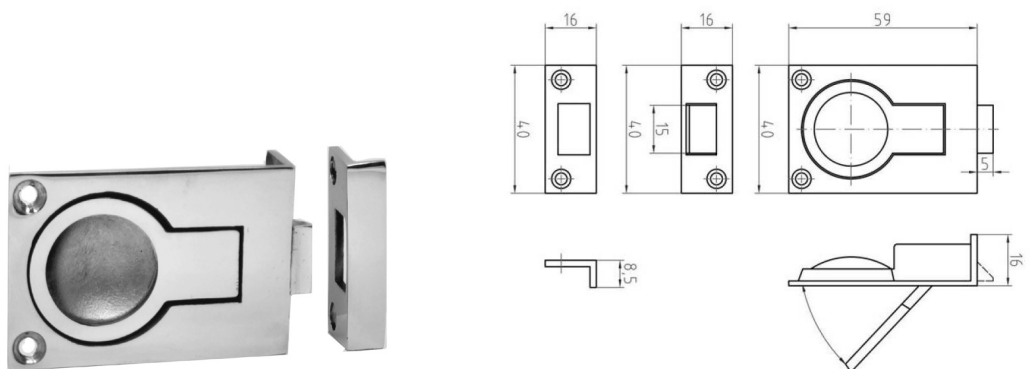


#46.108.208 Flush Pull Lift with latch Dimension: 60 x 40 x 15 mm;
Angle strike 15 x 15 x 42 mm; Door thickness: 5/8" or 15 mm

Pull Out to release



IZERWAREN
Order
numbers

- 21.516 **Finger pull (5160/61)**
with elbow catch, strike and.
latch operates by pulling lever with
finger, through hole in door.
Cover ring in hole in door:
drill 29 mm hole; OD: 34 mm ID: 23 mm
strike plate included; both handed

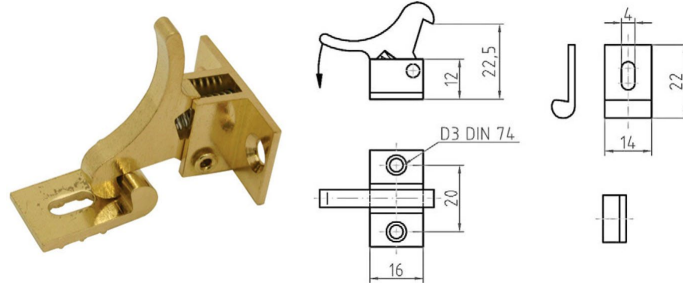

Finger pull #21.516 elbow catch; latch operates by pulling lever with finger, through hole in door. Strike plate included; both handed


- 21.2801 **Ring (631.02.801) Brass Polished**
Diameter 35 mm; 18 mm high;

- 21.2701 **Ring (631.02.701) Satin Nickel**
Diameter 35 mm; 18 mm high;




#21.2801 Brass #21.2701 nickel Brass Cover ring for hole in door:
Drill 35 mm hole; D = 35 mm; A = 19 mm

- 46.108 **Flush Pull Lift with latch (4108)**
Brass, polished chrome plated,
Strike plate included.
Body: 60 x 40 mm - 2 3/8" x 1 9/16";
Strike: 15 x 15 mm - 5/8" x 5/8"
mortise depth: 18 mm - 11/16"

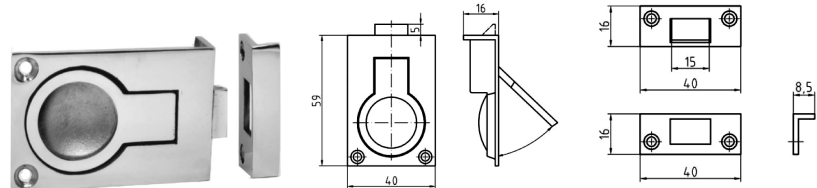

Finger pull catch #46.108 Polished stainless steel

- 46.020 **Flush Pull**
Brass, polished chrome plated,
Dimensions: 85 x 50 x 13mm
mortise depth: 13 mm 5/8"

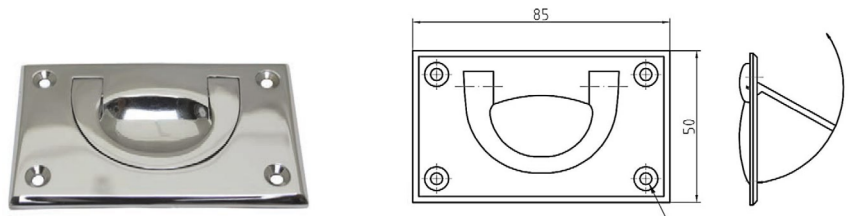


Flush pull #46.020 chrome/brass 85 x 50 mm.

- 43.214 **Flush Pull** stainless steel
2 1/4" x 3" ~ 57 x 76 mm
316 Cast Stainless steel

- 43.215 **Flush Pull** stainless steel
Dimensions: 2 1/2" x 1 3/4"
316 Cast Stainless steel

- 43.216 **Flush Pull** stainless steel
Dimensions: 1 1/2" x 1 15/16"
316 Cast Stainless steel



Flush Pull #43.214
3" x 2 1/4"



#43.215;
1 3/4" x 2 1/2"



#43.216;
1 1/2" x 1 15/16"