


**PULL SLAM LATCH  
MARINE GRADE**




**SHOWING PULL ACTION**  
Knob & Rose not included

**CUSTOM BACKSET AND  
CUSTOM DOOR THICKNESS**


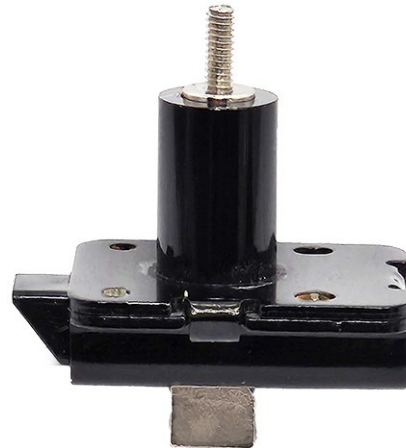


#24.P20: Pull mechanism black coated  
backset 20 mm; 25 mm and 30 mm  
or 3/4"; 1" and 1 3/16"  
Thread size: M4 or 8/32"


**PICTURE FOR ILLUSTRATION PURPOSES ONLY**

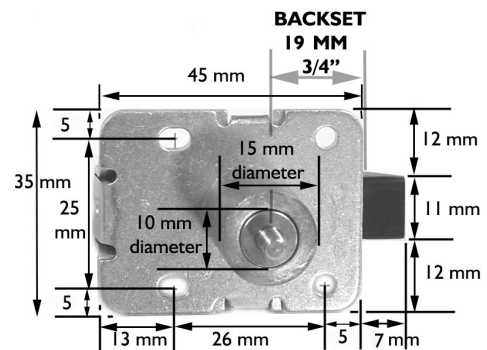


#24.P20 with 20 mm backset

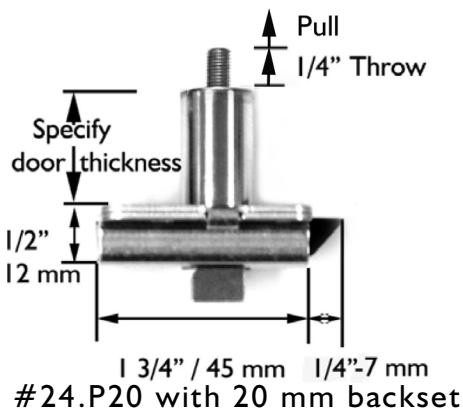


#29.020 Filler plate 6 mm 1/4" thick  
See page 2-2-5-D for all accessories




24.P20 Pull mechanism 19 mm backset ( 3/4"



#24.P25 Pull mechanism 25 mm backset ( 1"

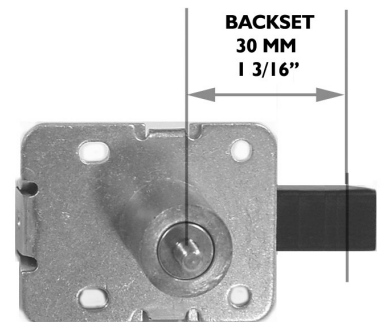

#24.P30 Pull mechanism 30 mm backset ( 1 3/16"



## Pull mechanism for Cabinet Doors (slam latch type)

page 2-2-5-A


Izerwaren  
Order #

- Mechanism made of aluminum with brass parts.
- Silver or black finish
- Standard: 3/4 inch thick doors
- Backset: 19, 25, 30 mm or more
- Custom backset / door thickness available.

24.P20 Pull mechanism;  
backset 3/4" or 19 mm  
thread size: M 4 or 8/32"  
For 3/4" material thickness  
Aluminum Body, Latch

24.P25 Pull mechanism;  
backset 1" or 25 mm  
thread size: M 4 or 8/32"  
For 3/4" material thickness  
Aluminum Body, Latch


24.P30 Pull mechanism;  
backset 1 3/16" or 30 mm  
thread size: M 4  
For 3/4" material thickness  
Aluminum Body, Brass Latch



#23.098S short #22.98L long  
Strike plate for 5/8 inch doors  
Strike plate for 1 1/4 inch doors  
Strike plate 3/4 inch doors  
Brass nickel plated



23.0971 #23.0971  
Strike for overlay doors  
Nickel plated brass



23.099 #23.099  
Roller bolt Strike plate,  
Stainless steel



**FOR SPECIAL APPLICATIONS**  
See page 2-2-5-D order numbers  
See page 2-2-5-C for layouts




#24.P20: Pull mechanism  
backset 20 mm, 25 mm and 30 mm  
3/4"; 1" and 1 3/16"

Thread size: M 4  
**KNOB NOT INCLUDED**  
**FOR ILLUSTRATION PURPOSES ONLY**





Pearl knob & rose #LZ.C0245  
See page 2-2-2-B for details

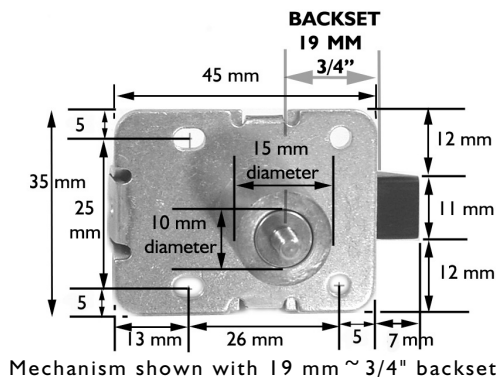


Mechanism shown with 19 mm ~ 3/4" backset




Mechanism also available in black  
Knob shown: LZ.B0214 see page 2-2-5-B  
Order Knob separate

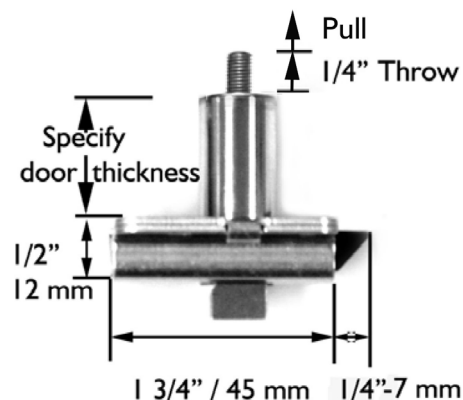


#29.020 Filler plate 6 mm 1/4" thick



24.P20 Pull mechanism 19 mm backset ( 3/4")

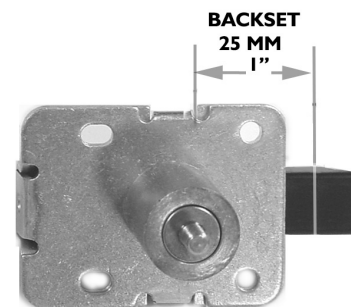


#24.P25 Pull mechanism 25 mm backset ( 1")

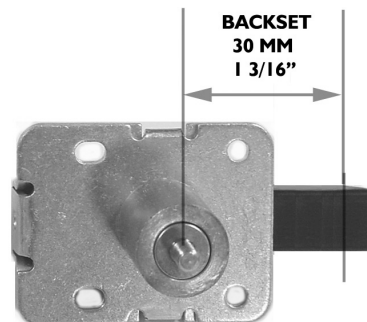

#24.P30 Pull mechanism 30 mm backset ( 1 3/16")






Izerwaren  
Order #

- Pull Mechanism made of aluminum with brass parts.
- Standard: 3/4 inch thick doors
- Backset: 3/4 inch or 1 inch
- Custom backset / thickness on special order.

LZ.C0245 Pearl Knob with separate Pearl rose  
Thread size: M 4  
Brass material,  
Finish:  
Gold, Brass, Chrome, Nickel  
2 sizes Please specify



#LZ.C0245 Pearl knob with rose  
backset 25 mm diameter  
Thread size: M 4




#LZ.C0245 Pearl knob with rose

LZ.B0214 Knob with rose attached  
Thread size: M 4  
Brass material  
Finish:  
Gold, Brass, Chrome, Nickel  
4 sizes Please specify



#LZ.B0214 Knob with rose (one piece)  
20 mm diameter  
Thread size: M 4





#LZ.B0214 Knob with rose (one piece)  
4 sizes

LZ.B0201 Round Knob with rose attached  
Thread size: M 4  
Brass material  
Finish:  
Gold, Brass, Chrome, Nickel  
5 sizes Please specify



#LZ.B0201 Knob with rose (one piece)  
25 mm diameter  
Thread size: M 4

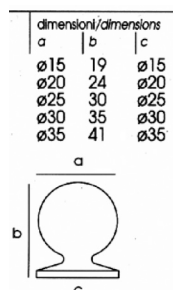



#LZ.B0201 Knob with rose (one piece)  
5 sizes

LZ.B0219 Ribbed Knob with rose attached  
Thread size: M 4  
Brass material  
Finish:  
Gold, Brass, Chrome, Nickel  
2 sizes Please specify



#LZ.B0203 Knob with rose (one piece)  
25 mm diameter  
Thread size: M 4

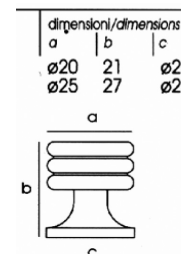


#LZ.B0203 Knob with rose (one piece)  
2 sizes

LZ.4632 Oval Ribbon Reed Knob and  
LZ.4519 Ribbon and Reed rose  
3/16" square rod  
Brass material  
Finish:  
Titanium Brass or Chrome




#24.P20 Pull mechanism  
Used with depicted knobs  
Works like a slam latch  
PAGE 2-2-5-A for details

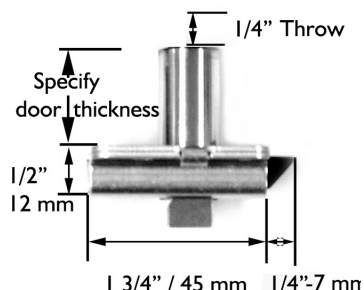

Please see page 2-2-5-D for  
installation and  
ordering details



#LZ.B0219 Knob  
30 mm diameter  
Thread size: M 4




#LZ.B0219 Knob 3 sizes



| Backset<br>20 mm                                           | Backset<br>25 mm                                           | Backset<br>30 mm                                                                              | <b>BACKSET MECHANISM IN RELATION TO DOOR LAY OUT</b>                                                                                                                                                                         |
|------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CUT HOLE FOR SHAFT FROM<br/>EDGE OF DOOR AT:</b>        |                                                            |                                                                                               | <b>DOOR THICKNESS (= B) ORDER FOR 3/4" INCH DOOR, OR 1" DOORS<br/>OR SPECIFY CUSTOM DOOR THICKNESS. UPTO 1 1/2" THICK.</b>                                                                                                   |
| Distance<br>= "A"<br>20 mm<br><br>Part no:<br>24.P20       | Distance<br>= "A"<br>25 mm<br><br>Part no:<br>24.P25       | Distance<br>= "A"<br>30 mm<br><br>Part no:<br>24.P30<br><br>up to<br>100 mm<br>/ 4 inch       | <p><b>Layout 1</b></p> <p>doorthickness "B"</p> <p>distance "A"</p> <p>Flush strike</p> <p>Set up with flush doors and flush strike. Strike #22.098S 9 mm lip #22.098M 19 mm lip #22.98L long 30 mm lip</p>                  |
| = "A"<br>29 mm<br><br>Part no:<br>24.P20                   | = "A"<br>34 mm<br><br>Part no:<br>24.P25                   | = "A"<br>39 mm<br><br>Part no:<br>24.P30<br><br>up to<br>100 mm<br>/ 4 inch                   | <p><b>Layout 2</b></p> <p>doorthickness "B"</p> <p>distance "A"</p> <p>angle strike for overlay doors</p> <p>Set up with overlay doors with angle strike for overlay doors Angle Strike #23.097</p>                          |
| = "A"<br>28 mm<br><br>Part no:<br>24.P20<br>+ filler plate | = "A"<br>33 mm<br><br>Part no:<br>24.P25<br>+ filler plate | = "A"<br>38 mm<br><br>Part no:<br>24.P30<br>+ filler plate<br><br>up to<br>100 mm<br>/ 4 inch | <p><b>Layout 3</b></p> <p>doorthickness "B"</p> <p>FILLER PLATE 1/4"</p> <p>Distance "A"</p> <p>Roller Bolt strike</p> <p>Setup with flush doors and roller bolt strike 1/4" filler plate required Roller Strike #23.099</p> |
| = "A"<br>35 mm<br><br>Part no:<br>24.P20<br>+ filler plate | = "A"<br>40 mm<br><br>Part no:<br>24.P25<br>+ filler plate | = "A"<br>45 mm<br><br>Part no:<br>24.P30<br>+ filler plate<br><br>up to<br>100 mm<br>/ 4 inch | <p><b>Layout 4</b></p> <p>doorthickness "B"</p> <p>FILLER PLATE 1/4"</p> <p>distance "A"</p> <p>Roller Bolt strike</p> <p>Set up with overlay doors and roller bolt strike 1/4" filler plate required Strike #23.099</p>     |



Knob #LZ.C0245

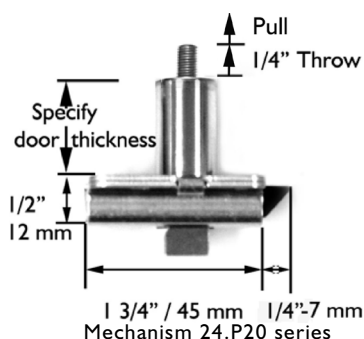

Aluminum body  
Knob #LZ.C0245



Black body  
Knob #LZ.B0214



Knob #LZ.B0214

| Part no. | Pull Mechanism:                      | Backset:                            | Door thickness:                                                             | Specify Knob thread: |
|----------|--------------------------------------|-------------------------------------|-----------------------------------------------------------------------------|----------------------|
| 24.P2020 | silver or black                      | 3/4" 19 mm                          | 3/4" - 19 mm                                                                | M4 or 8/32"          |
| 24.P2025 | silver or black                      | 3/4" 19 mm                          | 1" - 25 mm                                                                  | M4 or 8/32"          |
| 24.P2032 | silver or black                      | 3/4" 19 mm                          | 1 1/4" - 32 mm                                                              | M4 or 8/32"          |
| 24.P2038 | silver or black                      | 3/4" 19 mm                          | 1 1/2" - 38 mm                                                              | M4 or 8/32"          |
| 24.P2520 | silver or black                      | 1" 25 mm                            | 3/4" 19 mm                                                                  | M4 or 8/32"          |
| 24.P2525 | silver or black                      | 1" 25 mm                            | 1" - 25 mm                                                                  | M4 or 8/32"          |
| 24.P2532 | silver or black                      | 1" 25 mm                            | 1 1/4" - 32 mm                                                              | M4 or 8/32"          |
| 24.P2538 | silver or black                      | 1" 25 mm                            | 1 1/2" - 38 mm                                                              | M4 or 8/32"          |
| 24.P3020 | silver or black                      | 1 3/16" 30 mm                       | 3/4" 19 mm                                                                  | M4 or 8/32"          |
| 24.P3025 | silver or black                      | 1 3/16" 30 mm                       | 1" - 25 mm                                                                  | M4 or 8/32"          |
| 24.P3032 | silver or black                      | 1 3/16" 30 mm                       | 1 1/4" - 32 mm                                                              | M4 or 8/32"          |
| 24.P3038 | silver or black                      | 1 3/16" 30 mm                       | 1 1/2" - 38 mm                                                              | M4 or 8/32"          |
| 24.P00   | silver or black                      | Specify Backset (100 mm)            | Specify door thickness                                                      | M4 or 8/32"          |
| 29.020   | 1/4" thick filler plate              | Use with roller bolt strike #22.099 | Use with lay out #3 and #4                                                  |                      |
| 29.0001  | 1 mm thick filler plate              | Use for shimming                    | When needed                                                                 |                      |
| 22.098S  | Strike plate flush short             | Brushed nickel over brass           | Use with Lay out #1                                                         | <p>Lip 9 mm long</p> |
| 22.098L  | Strike plate flush Long              | Brushed nickel over brass           | Use with Lay out #1                                                         | <p>Lip 30 mm</p>     |
| 22.0971  | Strike plate angle For overlay doors | Brushed nickel over brass           | Use with Lay out #1                                                         |                      |
| 22.099   | Roller bolt strike                   | Brushed stainless steel             | Use with lay out #3 and #4<br>Size roller bolt: 1 3/16 x 3/8" 30 mm x 10 mm |                      |
| 23.012   | Strike plate angle                   | Brushed nickel over brass           | Use with layout #2; #3 and #4                                               |                      |





Push Latch Assembly  
Black

Push Latch Assembly  
Silver

Pull Latch Assembly  
Black

Pull Latch Assembly  
Silver




Latch Body  
Black

Latch Body  
Silver

Latch Body Spacer  
1/4" (6mm)

Latch Body Spacer  
1/8" (3mm)

Latch Body Spacer  
1/16" (1mm)

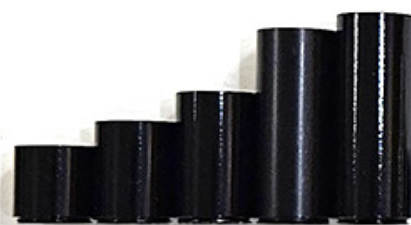

A B C D E  
Black Pull Latch Sleeve  
A. 1/2" (15mm)  
B. 3/4" (20mm)  
C. 1" (25mm)  
D. 1 1/2" (38mm)  
E. 1 3/4" (42mm)



A B C D  
Silver Pull Latch Sleeve  
A. 1/2" (15mm)  
B. 3/4" (20mm)  
C. 1" (25mm)  
D. 1 1/2" (38mm)



A B C D E  
Brass Pull Latch Plunger  
Nickel-Plated  
Available in 8-32 or M-4  
A. 1/2" (15mm)  
B. 3/4" (20mm)  
C. 1" (25mm)  
D. 1 1/2" (38mm)  
E. 1 3/4" (42mm)



Guide Block  
Black

Guide Block  
Silver

A B C  
Guide Block Spacer  
A. 1/4" (6mm)  
B. 1/8" (3mm)  
C. 1/16" (1mm)



A B  
Round Knob Spacer  
A. 1/4" (6mm)  
B. 1/8" (1mm)



SS  
Roller  
Strike

Push  
Latch  
Sleeve  
Brass

Push  
Latch  
Sleeve  
Chrome

Push  
Button  
Brass

Push  
Button  
Chrome

Push  
Button  
Plunger

8-32 / M-4  
Knob Screw

SS  
Latch  
Spring



A B C D E F G  
Available Latch Bolt Backsets  
A. 3/4" (20mm)  
B. 1" (25mm)  
C. 1 1/4" (29mm)  
D. 1 3/4" (35mm)  
E. 4" (100mm)  
F. 8" (200mm)  
G. 11 3/4" (298mm)